(12) **LEVEL** II

AD-E300896

DNA 4843F

A FIRST-ORDER METHODOLOGY FOR CALCULATING PROBABILITY OF MISSION SUCCESS

Agbabian Associates
250 North Nash Street
El Segundo, California 90245

31 January 1979

Final Report for Period 1 August 1978—31 January 1979

CONTRACT No. DNA 001-78-C-0373

DTIC
ELECTE
SEP 8 1980
S D
B

APPROVED FOR PUBLIC RELEASE;
DISTRIBUTION UNLIMITED.

Prepared for

Director

DEFENSE NUCLEAR AGENCY

Washington, D. C. 20305

80 8 15 032

Destroy this report when it is no longer needed. Do not return to sender.

REPORT DOCUMENTATION PAGE	READ INSTRUCTIONS BEFORE COMPLETING FORM	
1. REPORT NUMBER DNA-4843F, AD-E300 896	**2. GOVT ACCESSION NO.** AD-A088 910	**3. RECIPIENT'S CATALOG NUMBER**
4. TITLE (and Subtitle) A FIRST-ORDER METHODOLOGY FOR CALCULATING PROBABILITY OF MISSION SUCCESS.		**5. TYPE OF REPORT & PERIOD COVERED** Final Report for Period 1 Aug 78—31 Jan 79, **6. PERFORMING ORG. REPORT NUMBER** R-7914-4702
7. AUTHOR(s) Carl F. Bagge David Rothman		**8. CONTRACT OR GRANT NUMBER(s)** DNA 001-78-C-0373
9. PERFORMING ORGANIZATION NAME AND ADDRESS Agbabian Associates 250 North Nash Street El Segundo, California 90245		**10. PROGRAM ELEMENT, PROJECT, TASK AREA & WORK UNIT NUMBERS** Subtask Y99QAXSC061-64
11. CONTROLLING OFFICE NAME AND ADDRESS Director Defense Nuclear Agency Washington, D.C. 20305		**12. REPORT DATE** 31 Jan 79 **13. NUMBER OF PAGES** 74
14. MONITORING AGENCY NAME & ADDRESS(if different from Controlling Office)		**15. SECURITY CLASS (of this report)** UNCLASSIFIED **15a. DECLASSIFICATION/DOWNGRADING SCHEDULE**

16. DISTRIBUTION STATEMENT (of this Report)

Approved for public release; distribution unlimited.

17. DISTRIBUTION STATEMENT (of the abstract entered in Block 20, if different from Report)

19. KEY WORDS (Continue on reverse side if necessary and identify by block number)

Probability of Mission Success	Random Variables
Closed-form Solutions	Random Uncertainty
Probability Theory	Systematic Uncertainty
Statistical Analysis	Correlations

20. ABSTRACT (Continue on reverse side if necessary and identify by block number)

A first-order methodology for calculating the probability that a system will
successfully complete its mission was developed, illustrated, and validated.
The methodology is directed to analysts, designers, managers, physicists,
and planners who are unaccustomed to working with statistics and probability
theory, but who are assumed to have had an introductory course in statistics
and probability theory. The methodology, which makes use of closed-form
solutions and is quite transparent, is designed to yield results quickly and

20. ABSTRACT (Continued)

and without the use of a large computer. It is not intended to replace the formal, more accurate computerized methodologies that use Monte Carlo simulations or numerical partitioning. Within its specified applicable domain, the methodology yields quantitatively accurate results. The applicable domain is sufficiently large to encompass many problems of interest to the Defense Nuclear Agency community.

ACCESSION for

NTIS	White Section	☑
DDC	Buff Section	☐
UNANNOUNCED		☐
JUSTIFICATION		

BY
DISTRIBUTION/AVAILABILITY CODES

Dist.	. and/or SPECIAL	
A		

SUMMARY

An analytical methodology is presented for calculating, to the first order, the probability that a system will successfully complete its mission. The methodology, which is quite transparent, is designed to yield results quickly and without the use of a large computer. It is not intended to replace the formal, more accurate computerized methodologies that use Monte Carlo simulation or numerical partitioning.

The probability of mission success is calculated by collapsing a network of probabilities. Each network probability represents the probability of no failure of the system in a failure mode that, either by itself or in concert with other failure modes, would abort the mission. The fact that there is a probability of failure of the system in a given failure mode reflects the uncertainty embodied in the system's capacity, or in the demand placed on the system, or both. Systematic and random uncertainties are differentiated. The systematic uncertainties are associated with the estimates of the capacity and demand means, which are treated as random variables. The systematic uncertainties are ultimately reflected as variability in the calculated probability of mission success.

The system failure modes that would abort the mission are grouped into sets such that within each set it can be reasonably assumed that there is perfect dependency; between sets, it can be reasonably assumed that there is statistical independency. Each such set represents one probability in the system's probability-of-mission-success network. Arbitrary correlation, reflecting the systematic uncertainty in the estimates of capacity and demand means, is admitted between any two probabilities in the network.

The density distributions for capacities, capacity means, demands, and demand means are assumed to be lognormal. The effect of this assumption and of other approximations inherent in the methodology are demonstrated by working illustrative problems with both the presented methodology and Monte Carlo simulation. The applicable domain of the methodology hereby established is sufficiently large to encompass many problems of interest to analysts, designers, managers, physicists, and planners in the Defense Nuclear Agency community.

The presented methodology (or for that matter any methodology of the same purpose) requires that systematic uncertainties be quantified using subjective reasoning. If a sponsor will not accept subjective estimates, then there can be no application of the methodology. Most sponsors, however, will entertain the idea of subjective estimates if the bases for these estimates are well documented.

1

PREFACE

The writers wish to thank A.H-S. Ang, Professor of Civil Engineering, University of Illinois, for his critical review of Appendixes A and B and for his constructive suggestions for improving the presentations. Finally, the valuable guidance and suggestions provided by CPT M. Moore, the Contracting Officer's representative, during the conduct of this project are gratefully acknowledged.

TABLE OF CONTENTS

LIST OF ILLUSTRATIONS

LIST OF TABLES

SECTION 1

INTRODUCTION

1-1   PURPOSE.

The purpose of this document is to present a first-order methodology for calculating the probability that a system will successfully complete its mission, to illustrate the methodology, and to validate the methodology.

1-2   APPLICABILITY.

The methodology is directed to analysts, designers, managers, physicists, and planners who are unaccustomed to working with statistics and probability theory. The users, however, are assumed to have had an introductory course in statistics and probability theory. The methodology, which makes use of closed-form solutions and is quite transparent, is designed to yield results quickly and without the use of a large computer. It is not intended to replace the formal, more accurate computerized methodologies that use Monte Carlo simulation or numerical partitioning.

Within its specified applicable domain, the methodology yields quantitatively accurate results. Outside its domain, it yields qualitatively accurate results. The applicable domain is sufficiently large to encompass many problems of interest to the Defense Nuclear Agency community.

1-3   BACKGROUND.

Either an explicit or an implicit probability-of-mission-success criterion is imposed on the designing of a system, be it civil or military, small or large, simple or complex. Each mission of the system would have its own criterion. A typical explicit criterion would read:

> The lower one-sided Q-confidence limit for the probability that the system will successfully complete Mission X shall be at least PMS_o.

Implicit criteria, by contrast, make use of such terms as "factor of safety," "margin of safety," and "reserve capacity." Implicit criteria, which call for deterministic methodology, are not addressed here.

The probability of mission success is calculated by collapsing a series-parallel network of probabilities. Each network probability represents the probability of no failure of the system in a failure mode that, either by itself or in concert with other failure modes, would abort the mission. The fact that there is a probability of failure of the system in a given failure mode reflects the uncertainty embodied in the system's capacity, or in the demand placed upon the system, or both. In general, both random and systematic uncertainties are present. Random uncertainty cannot effectively be reduced by gathering more data or by conducting research and development. Systematic uncertainty, however, can be reduced by gathering more data or by conducting research and development, since it reflects parameter estimation and modeling errors; i.e., it reflects our ignorance. The presence of systematic uncertainty prevents us from calculating the probability of mission success with 100% confidence.

Refer to Reference 6 for additional background.

1-4   ORGANIZATION.

This report is organized into nine sections and two appendixes. Section 2 explains how to calculate the mean, the random coefficient of variation, and the systematic coefficient of variation of the system's capacity in a given failure mode and of the demand placed on the system. Section 3 explains how to calculate the probability that a capacity will exceed a single application of a demand. The methodology presented in Section 3 is extended in Section 4 to the problem of repeated applications of demand. Section 5 concludes that the methodology presented in Section 4 is, with a change of notation, also applicable to a set of failure modes. Section 6 explains how to use the methodology presented in Sections 2 through 5 to assess the probability of mission success of an existing system. Section 7 explains how the reverse concept of assessment, the allocation of the probability of mission success to an evolving system, is accomplished. Finally, closing remarks are made in Section 8. References are given in Section 9. Key derivations are given Appendixes A and B.

With the exception of Sections 5, 8, and 9, each section is organized into four subsections: introduction of the subject, methodology, example problems solved by the methodology, and validation of the methodology by re-solving the example problem with Monte Carlo simulation.

SECTION 2

CAPACITY AND DEMAND

2-1   INTRODUCTION.

A system responding in a given failure mode is characterized by its current capacity to resist failure and by the demand placed on the system. In general, both the capacity and the demand will be random variables. For our purposes, three descriptors are sufficient to describe the capacity or the demand: (1) its mean (expected, or average) value; (2) its random coefficient of variation[*] (COV); and (3) its systematic COV. Use the equations given below to calculate these three descriptors for the capacity. Change the notations used in these equations and use them to calculate the three descriptors for the demand.

2-2   METHODOLOGY.

First, either implicitly or explicitly state capacity C symbolically in terms of its (functionally) independent variables:

$$C = f(x_1, \ldots x_j, \ldots x_J) \tag{2-1}$$

The first-order approximation of the mean of C is simply[+]

$$\mu_C \doteq f\left(\mu_{x_1}, \ldots \mu_{x_j}, \ldots \mu_{x_J}\right) \tag{2-2}$$

where μ_{x_j} is the mean of x_j. Equation 2-2 is quite accurate, provided that the nonlinearity in $f(\cdot)$ with respect to x_j, near μ_{x_j}, is not severe and that the variability of x_j is not large. If required, the accuracy of Equation 2-2 can be increased by adding the second-order term:

$$\mu_C \doteq f\left(\mu_{x_1}, \ldots \mu_{x_j}, \ldots \mu_{x_J}\right) + 0.5 \sum_{j=1}^{J} \mu_{x_j}^2 \frac{\partial^2 f}{\partial x_j^2} \delta_{x_j}^2$$

$$+ 0.5 \sum_{i=1}^{J} \sum_{\substack{j=1 \\ i \neq j}}^{J} \mu_i \mu_j \frac{\partial^2 f}{\partial x_i \partial x_i} \rho_{ij} \delta_{x_i} \delta_{x_j} \tag{2-3}$$

---

[*]The standard deviation divided by the mean.

[+]See, for example, Reference 1 for the derivation of Equations 2-2, 2-3, and 2-4.

7

where $\partial^2 f/\partial x_j^2$ is to be evaluated at μ_{x_1}, μ_{x_2}, μ_{x_3},...; δ_{x_j} is the COV of x_j; and ρ_{ij} is the correlation coefficient for x_i and x_j. The square of the COV of C is simply

$$\delta_C^2 \doteq \sum_{j=1}^{J} \left(\frac{\mu_{x_j}}{\mu_C}\right)^2 \left(\frac{\partial f}{\partial x_j}\right)^2 \delta_{x_j}^2 + \sum_{\substack{i=1 \\ i \neq j}}^{J} \sum_{j=1}^{J} \frac{\mu_{x_i} \mu_{x_j}}{\mu_C^2} \frac{\partial f}{\partial x_i} \frac{\partial f}{\partial x_j} \rho_{ij} \delta_{x_i} \delta_{x_j} \qquad (2-4)$$

Equation 2-4 is quite accurate for $\delta_{x_j}^2 \ll 1$. Notice that the estimates of μ_C and δ_C are dependent only on the means and COVs of the probability density distributions of the independent variables; distribution details enter into the higher-order terms, which are not used here.

Invariably, your values for the mean and COV of x_j will be only estimates. In general, the error in your estimates of δ_{x_j}, the actual COV of x_j, will not be of consequence relative to the error in your estimate of μ_{x_j}, the actual mean of x_j. Therefore, neglect the error in your estimate of δ_{x_j}, but a count for your error in estimating μ_{x_j} by assuming that $\bar{x}_j$, your best estimate of μ_{x_j}, is itself a random variable with actual mean μ_{x_j} and actual COV $\Delta_{\bar{x}_j}$. Denote δ_{x_j} as the random COV of x_j, and $\Delta_{\bar{x}_j}$ as the systematic COV of $\bar{x}_j$. In a similar fashion, account for the random and systematic uncertainty in your functional form of C (Eq. 2-1).[*] Equations 2-2, 2-3, and 2-4 now become

$$\bar{C} \doteq f(\bar{x}_1, \ldots \bar{x}_j, \ldots \bar{x}_J) \qquad (2\text{-}2a)$$

$$\bar{C} \doteq f(\bar{x}_1, \ldots \bar{x}_j, \ldots \bar{x}_J) + 0.5 \sum_{j=1}^{J} \bar{x}_j^2 \frac{\partial^2 f}{\partial x_j^2} \delta_{x_j}^2 + 0.5 \sum_{\substack{i=1 \\ i \neq j}}^{J} \sum_{j=1}^{J} \bar{x}_i \bar{x}_j \frac{\partial f}{\partial x_i \partial x_j} \rho_{ij} \delta_{x_i} \delta_{x_j}$$

$$(2\text{-}3a)$$

---

[*]This concept for accounting for your error in estimating δ_{x_i} and μ_{x_j} comes from Ang (see, for example, Ref.2). However, in what follows, we depart from Ang's method of application of this concept.

$$\delta_C^2 \doteq \delta_f^2 + \sum_{j=1}^{J}\left(\frac{\bar{x}_j}{\bar{C}}\right)^2\left(\frac{\partial f}{\partial x_j}\right)^2 \delta_{x_j}^2 + \sum_{i=1}^{J}\sum_{\substack{j=1\\i\neq j}}^{J} \frac{\bar{x}_i\bar{x}_j}{\bar{C}^2}\frac{\partial f}{\partial x_i}\frac{\partial f}{\partial x_j}\rho_{ij}\delta_{x_i}\delta_{x_j} \qquad (2\text{-}4a)$$

where δ_f is your best estimate of the COV that reflects the random variability in the functional form of C for given values of x_j, and the remaining symbols, conventions, and restrictions are as previously defined. Use Equation 2-2a or 2-3a to calculate the mean of C, and Equation 2-4a to calculate the random COV of C.

Use the following approximate expression to calculate the square of the systematic COV of $\bar{C}$:

$$\Lambda_{\bar{C}}^2 \doteq \Lambda_{\bar{f}}^2 + \sum_{j=1}^{J}\left(\frac{\bar{x}_j}{\bar{C}}\right)^2\left(\frac{\partial f}{\partial \bar{x}_j}\right)^2 \Lambda_{\bar{x}_j}^2 + \sum_{i=1}^{J}\sum_{\substack{j=1\\i\neq j}}^{J} \frac{\bar{x}_i\bar{x}_j}{\bar{C}^2}\frac{\partial f}{\partial \bar{x}_i}\frac{\partial f}{\partial \bar{x}_j}\rho_{\bar{i}\bar{j}}\Lambda_{\bar{x}_i}\Lambda_{\bar{x}_j} \qquad (2\text{-}5)$$

where $\Lambda_{\bar{x}_j}$ is the COV you associate with how well $\bar{x}_j$ represents μ_{x_j}; $\Lambda_{\bar{f}}$ is the COV you associate with the modeling error in your functional form of C; $\rho_{\bar{i}\bar{j}}$ is the correlation coefficient for $\bar{x}_i$ and $\bar{x}_j$; and the remaining symbols, conventions, and restrictions are as previously defined. Notice the similarity between Equations 2-4a and 2-5.

Determine $\bar{x}_j$, δ_{x_j}, δ_f, and ρ_{ij} from appropriate statistical data. Choose $\Lambda_{\bar{x}_j}$ by quantifying your "degrees of belief" about how well $\bar{x}_j$ represents μ_{x_j}, the actual mean of x_j.[*] (Similarly for $\Lambda_{\bar{f}}$.) Use the information provided in Figure 2-1 to help quantify your degrees of belief. Use judgment to assign values for $\rho_{\bar{i}\bar{j}}$, the correlation coefficient for $\bar{x}_i$ and $\bar{x}_j$.

It should not be overlooked that a large, deterministic computer code can be used to calculate means and COVs with the above methodology. The code itself would be used to calculate the first-order estimate of the mean and the partial derivatives appearing in the equations for the COVs. The stringing together of these partials for the actual calculation of the COVs and the second-order estimate of the mean would be done outside the code.

---

[*] If experiments have been performed, use $\Lambda_{\bar{x}_j} \doteq \delta_{x_j}/\sqrt{n}$, where n is the number of experiments.

2-3   ILLUSTRATIVE USE.

Calculate the mean, the random COV, and the systematic COV of the capacity

$$C = x^2 \exp(0.50y)$$

where

$$\tilde{x} = 1.00$$

$$\tilde{y} = 0.50$$

$$\delta_x = 0.17$$

$$\delta_y = 0.23$$

$$\delta_f = 0.10$$

$$\Delta_{\bar{x}} = 0.03$$

$$\Delta_{\bar{y}} = 0.11$$

$$\Delta_{\bar{f}} = 0.15$$

$$\rho_{xy} = \rho_{yx} = 0.50$$

$$\rho_{\bar{x}\bar{y}} = \rho_{\bar{y}\bar{x}} = 0.00$$

First, calculate $\bar{C}$, δ_C, and $\Delta_{\bar{C}}$ using Equation 2-2a to estimate the mean of C.

Equation 2-2a.

$$\bar{C} \doteq \bar{x}^2 \exp(0.50\bar{y})$$

$$\doteq 1.284$$

Equation 2-4a.

$$\delta_C^2 \doteq \delta_f^2 + 4\delta_x^2 + 0.25\bar{y}^2\delta_y^2 + \bar{y}\rho_{xy}\delta_x\delta_y + \bar{y}\rho_{yx}\delta_x\delta_y$$

$$\doteq 0.385^2$$

Equation 2-5.

$$\Lambda_{\bar{C}}^2 = \Lambda_{\bar{f}}^2 + 4\Lambda_{\bar{x}}^2 + 0.25\bar{y}^2\Lambda_{\bar{y}}^2 + \bar{y}\rho_{\bar{x}\bar{y}}\Lambda_{\bar{x}}\Lambda_{\bar{y}} + \bar{y}\rho_{\bar{y}\bar{x}}\Lambda_{\bar{x}}\Lambda_{\bar{y}}$$

$$= 0.164^2$$

Now, calculate $\bar{C}$, δ_C, and $\Delta_{\bar{C}}$ using Equation 2-3a to estimate the mean of C.

Equation 2-3a.

$$\bar{C} \doteq \bar{x}^2 \exp(0.50\bar{y})\left[1 + \delta_x^2 + 0.125\bar{y}^2\delta_y^2 + 0.5\rho_{xy}\delta_x\delta_y + 0.5\rho_{yx}\delta_x\delta_y\right]$$

$$\doteq 1.284 \times 1.05$$

$$\doteq 1.348$$

Equation 2-4a.

$$\delta_C^2 = \frac{0.385^2}{1.05^2} = 0.367^2$$

Equation 2-5.

$$\Lambda_{\bar{C}}^2 = \frac{0.164^2}{1.05^2} = 0.156^2$$

Since the second-order terms are only 5% of the first-order term, we can conclude that the estimates of $\bar{C}$, δ_C, and $\Delta_{\bar{C}}$ are, as will be seen below, relatively accurate and relatively insensitive to the assumed distributions of x, y, f, $\bar{x}$, $\bar{y}$, and $\bar{f}$.

2-4 VALIDATION

In order to validate the methodology presented in this document, we have used the Monte Carlo simulation technique to rework the illustrative problems. In this technique, pseudorandom variates are generated on a computer to form artificial samples. We used the Marsaglia-Bray method (Ref. 3) on a Data General Eclipse S/130 computer to generate pseudorandom normal and lognormal deviates. Cycling of the deviates was required for some of the problems because of inadequate word length on the computer.

In our simulations for the illustrative problem presented in Section 2-3, an outer loop of size 1000 controlled the generation of the systematic deviates. For each set of systematic deviates, an inner loop of 1000 sets of random deviates was collected. In our first simulation, all distribution models (x, y, f, $\bar{x}$, $\bar{y}$, $\bar{f}$) were assumed normal. The results were $\bar{C} = 1.339$, $\delta_C = 0.378$, and $\Lambda_{\bar{C}} = 0.152$. Our methodology, which makes no assumption as to distribution, yielded $\bar{C} = 1.348$, $\delta_C = 0.367$, and $\Lambda_{\bar{C}} = 0.156$. The agreement is seen to be quite good.

In our second simulation, all distribution models except f and $\bar{f}$ were changed to lognormal to test the sensitivity of the results to the assumed distribution models. The results were $\bar{C} = 1.344$, $\delta_C = 0.399$, and $\Lambda_{\bar{C}} = 0.153$. It is seen that the assumed distributions of x, y, f, $\bar{x}$, $\bar{y}$, and $\bar{f}$ do have an influence on $\bar{C}$, δ_C, and $\Lambda_{\bar{C}}$, but that it is small. In general, this influence will be small regardless of the distributions, provided the second-order term in Equation 2-3a is small compared to the first-order term.

LOGNORMAL DISTRIBUTION OF $\bar{x}_j$

$$\mu_{x_j}\left(1 + \Delta_{\bar{x}_j}^2\right)^{1/2} \exp\left[-k_Q \ln^{1/2}\left(1 + \Delta_{\bar{x}_j}^2\right)\right] \leq \bar{x}_j \leq \mu_{x_j}\left(1 + \Delta_{\bar{x}_j}^2\right)^{1/2} \exp\left[k_Q \ln^{1/2}\left(1 + \Delta_{\bar{x}_j}^2\right)\right]$$

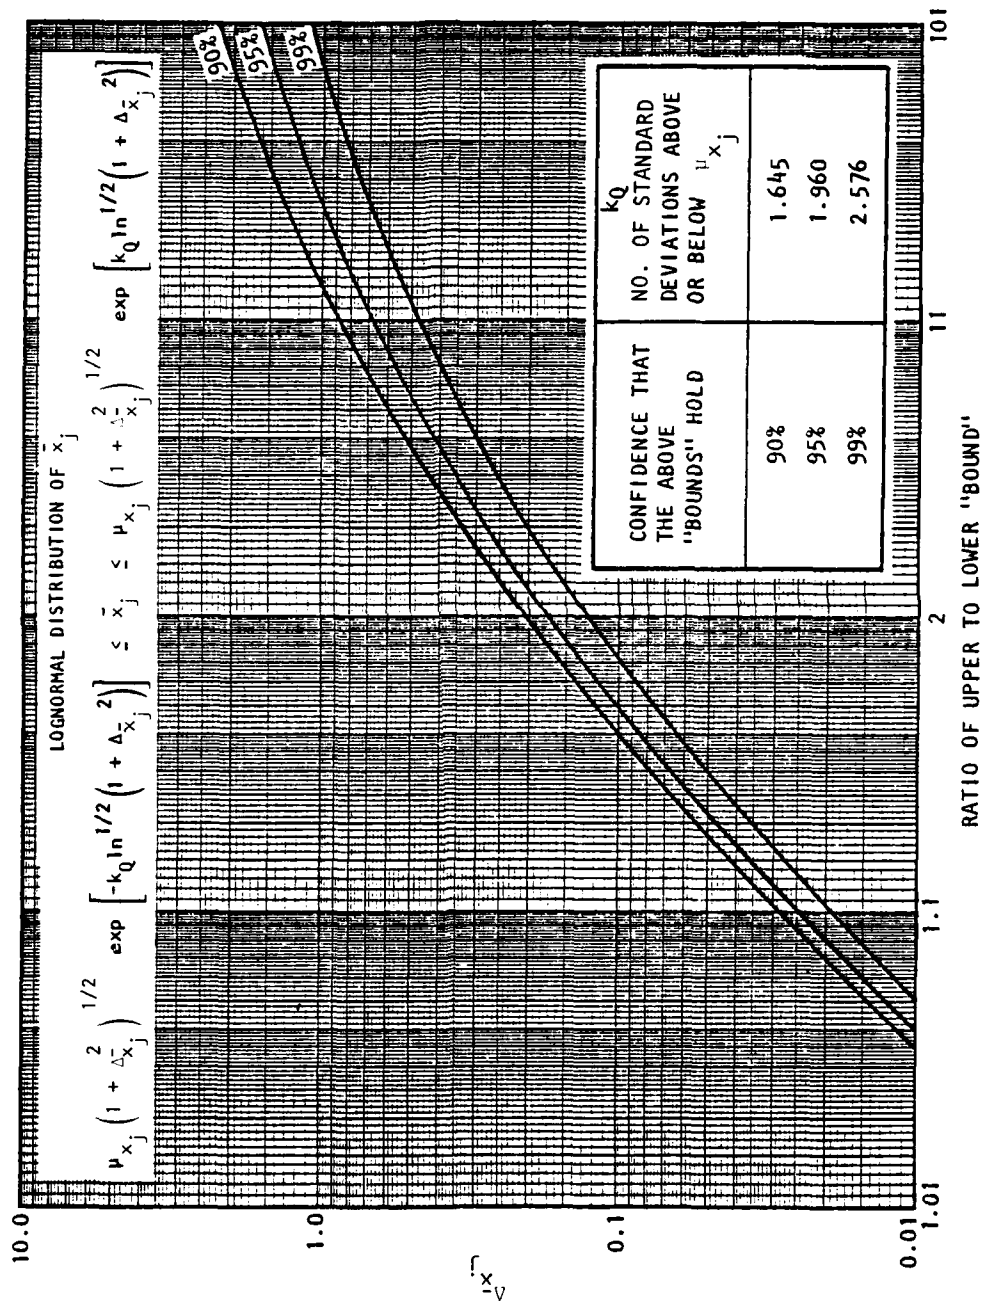| CONFIDENCE THAT THE ABOVE "BOUNDS" HOLD	k_Q NO. OF STANDARD DEVIATIONS ABOVE OR BELOW μ_{x_j}
90%	1.645
95%	1.960
99%	2.576

RATIO OF UPPER TO LOWER "BOUND"

Figure 2-1. Aid in assigning $\Delta_{\bar{x}_j}$.

13

SECTION 3

CAPACITY WILL EXCEED DEMAND

3-1   INTRODUCTION.

Consider a failure mode where the system's capacity is C under the demand D. The probability that C will exceed D can be calculated with 100% confidence if you know the distribution, the true value of the mean, the random COV, and the functional form of C and D, that is, if $\Delta_{\bar{C}} = \Delta_{\bar{D}} = \Delta_{\bar{f}_C} = \Delta_{\bar{f}_D} = 0$. For lognormal distribution of C and D, this probability is precisely

$$P(C > D) = \Phi \left\{ \frac{\ln\left(\frac{\mu_C}{\mu_D}\sqrt{\frac{1 + \delta_D^2}{1 + \delta_C^2}}\right)}{\sqrt{\ln\left(1 + \delta_C^2\right)\left(1 + \delta_D^2\right)}} \right\} \tag{3-1}$$

where

μ_C =   Mean of C

μ_D =   Mean of D

δ_C =   COV of C

δ_D =   COV of D

$\Phi(\xi)$ =   Cumulative probability of the standard normal variate ξ (see Table 3-1)

However, for the realistic case of nonzero Δ's, $P(C > D)$ itself becomes a random variable, in the Bayesian sense, with expected value $\bar{P}$ and systematic COV Δ_P. In what follows, we elect to write $Q(P > P_o)$ for the probability that $P > P_o$, and to read $Q(P > P_o)$ as "our confidence that P exceeds P_o."

This section shows how to calculate $\bar{P}$, Δ_P, and $Q(P > P_o)$ for lognormal distribution of C, D, $\bar{C}$, and $\bar{D}$ and for functionally and statistically independent C, D, $\bar{C}$, and $\bar{D}$. However, the methodology will yield reasonably accurate results for other unimodal distributions when $\bar{P}$, P_o, and Q are near 0.5, say, $0.01 < (\bar{P}, P_o, Q) < 0.99$.

14

3-2   METHODOLOGY.

Calculate the expected value of $P(C > D)$ using the following equation:[*]

$$\bar{P}(C > D) \doteq \Phi\left\{ \frac{\ln\left[\frac{\bar{C}}{\bar{D}}\sqrt{\frac{\left(1 + \delta_D^2\right)\left(1 + \Delta_{\bar{C}}^2\right)}{\left(1 + \delta_C^2\right)\left(1 + \Delta_{\bar{D}}^2\right)}}\right]}{\sqrt{\left(1 + T^2\right)\ln\left(1 + \delta_C^2\right)\left(1 + \delta_D^2\right)}} \right\} \tag{3-2}$$

where

$\bar{C}$ = Your best estimate of μ_C, the actual mean (average, or expected) value of C (see Eqs. 2-2a and 2-3a)

$\bar{D}$ = Your best estimate of μ_D, the actual mean (average, or expected) value of D

$\Delta_{\bar{C}}$ = COV that reflects how well $\bar{C}$ represents μ_C, the actual mean of C (see Eq. 2-5)

$\Delta_{\bar{D}}$ = COV that reflects how well $\bar{D}$ represents μ_D, the actual mean of D

$\Phi(\xi)$ = Cumulative probability of the standard normal variate ξ (see Table 3-1)

δ_C = COV that reflects your best estimate of the random nature of C (see Eq. 2-4a)

δ_D = COV that reflects your best estimate of the random nature of D

$$T = \sqrt{\frac{\ln\left(1 + \Delta_{\bar{C}}^2\right)\left(1 + \Delta_{\bar{D}}^2\right)}{\ln\left(1 + \delta_C^2\right)\left(1 + \delta_D^2\right)}} \tag{3-3}$$

Note that the ratio $\bar{C}/\bar{D}$ is, to the first order, the mean factor of safety. For small COVs (i.e., $\delta_C^2 \ll 1$, $\delta_D^2 \ll 1$, $\Delta_{\bar{C}}^2 \ll 1$, and $\Delta_{\bar{D}}^2 \ll 1$), Equation 3-2 reduces to

---

[*]The derivation of Equations 3-2 and 3-5 is given in Appendix A.

$$\bar{P}(C > D) \; \doteq \; \phi\left\{ \frac{\ln(\bar{C}/\bar{D})}{\sqrt{\left(1 + T^2\right)\left(\delta_C^2 + \delta_D^2\right)}} \right\} \qquad (3\text{-}2a)$$

where

$$T \; = \; \sqrt{\frac{\Delta_C^2 + \Delta_D^2}{\delta_C^2 + \delta_D^2}} \qquad (3\text{-}3a)$$

Equation 3-2a is displayed in Figure 3-1.

The median value of $P(C > D)$ is

$$\tilde{P}(C > 0) \; \doteq \; \phi\left(k_{\bar{P}} \sqrt{1 + T^2}\right) \qquad (3\text{-}4)$$

where $\bar{P} = \phi(k_{\bar{P}})$. *With the aid of Equation 3-2, Equation 3-4 becomes*

$$\tilde{P}(C > D) \; \doteq \; \phi\left\{ \frac{\ln\left[\frac{\bar{C}}{\bar{D}}\sqrt{\frac{\left(1 + \delta_D^2\right)\left(1 + \Delta_C^2\right)}{\left(1 + \delta_C^2\right)\left(1 + \Delta_D^2\right)}}\,\right]}{\sqrt{\ln\left(1 + \delta_C^2\right)\left(1 + \delta_D^2\right)}} \right\} \qquad (3\text{-}5)$$

Use Figure 3-2, or the following approximate expressions, to determine the systematic COV of $P(C > D)$:[*]

$$\Delta_P^2 \; \doteq \; \frac{T^2}{2\pi\bar{P}^2\left(1 + T^2\right)} \exp\left(-k_{\bar{P}}^2 \cdot \frac{1 + T^2}{1 + \frac{3}{2} T^2}\right) \qquad \text{for } T < 0.7 \qquad (3\text{-}6)$$

$$\Delta_P^2 \; \doteq \; \frac{\left(0.25 - \frac{1}{\pi}\cot^{-1}\sqrt{1 + 2T^2}\right)\left[4\bar{P}(1 - \bar{P})\right]^{1.327T^{-0.2155}}}{\bar{P}^2} \qquad \text{for } T > 0.7 \qquad (3\text{-}7)$$

---

[*]Unfortunately, a closed-form expression for Δ_P could not be derived. The derivation of Equations 3-6 and 3-7 is given in Appendix B. It should be noted that Equation 3-7 is partially empirical.

Use the following equation to calculate your confidence that $P(C > D) > P_o$: [*]

$$Q(P > P_o) = \phi\left(\frac{k_{\tilde{P}} \sqrt{1 + T^2} - k_{P_o}}{T}\right) \tag{3-8}$$

$$= \phi\left(\frac{k_{\tilde{P}} - k_{P_o}}{T}\right) \tag{3-8a}$$

Equation 3-8a is plotted in Figure 3-3 for an illustrative value of $\tilde{P}$ and for various T. Note that Equation 3-8 plots as a straight line in normal-normal probability space.

The following alternative form of Equation 3-2 is better suited for calculating the required mean factor of safety of a failure mode:

$$\frac{\tilde{C}}{\tilde{D}} = \sqrt{\frac{\left(1 + \delta_C^2\right)\left(1 + \Delta_{\tilde{D}}^2\right)}{\left(1 + \delta_D^2\right)\left(1 + \Delta_{\tilde{C}}^2\right)}} \, \exp\left[k_{\tilde{P}} \sqrt{\left(1 + T^2\right) \ln\left(1 + \delta_C^2\right)\left(1 + \delta_D^2\right)}\right] \tag{3-9}$$

For small COVs, Equation 3-9 reduces to

$$\frac{\tilde{C}}{\tilde{D}} = \exp\left[k_{\tilde{P}} \sqrt{\left(1 + T^2\right)\left(\delta_C^2 + \delta_D^2\right)}\right] \tag{3-9a}$$

3-3 ILLUSTRATIVE USE.

Calculate the probability that capacity will exceed demand, where

$$\tilde{C} = 1.28 \qquad \delta_D = 0.21$$

$$\tilde{D} = 0.55 \qquad \Lambda_{\tilde{C}} = 0.16$$

$$\delta_C = 0.39 \qquad \Delta_{\tilde{D}} = 0.24$$

---

[*]Substitution of the lower one-sided Q-confidence limit for μ_C/μ_D into Equation 3-1 yields, upon rearranging terms, Equation 3-8.

First calculate the parameter T (Eq. 3-3):

$$T = \sqrt{\frac{\ln(1 + 0.16^2)(1 + 0.24^2)}{\ln(1 + 0.39^2)(1 + 0.21^2)}} = 0.663$$

Next, calculate the expected probability of no failure (Eq. 3-2):

$$\bar{P}(C > D) = \phi\left\{\frac{\ln \dfrac{1.28}{0.55}\sqrt{\dfrac{(1 + 0.21^2)(1 + 0.16^2)}{(1 + 0.39^2)(1 + 0.24^2)}}}{\sqrt{(1 + 0.66^2)\ln(1 + 0.39^2)(1 + 0.21^2)}}\right\}$$

$$= \phi(1.51)$$

$$= 0.935 \text{ (Table 3-1)}$$

Next, for the purpose of later reference, calculate Δ_P^2 (Eq. 3-6):

$$\Delta_P^2 = \frac{0.663^2}{2\pi \times 0.935^2 \times (1 + 0.663^2)} \text{Exp}\left[- 1.51^2 \left(\frac{1 + 0.663^2}{1 + 1.5 \times 0.663^2}\right)\right]$$

$$= 0.0877^2$$

Next, calculate three points on the Q vs. P_o curve using Equation 3-8:

$$Q = \phi\left(\frac{1.51\sqrt{1 + 0.66^2} - k_{P_o}}{0.66}\right)$$

$$= \phi\left(\frac{1.81 - k_{P_o}}{0.66}\right)$$

P_o	Q
0.5	0.997
0.965	0.5
0.999	0.26

Plotting these three points in normal-normal probability space yields the solid line shown in Figure 3-4. The open and filled circles are the data points that result from a reworking of this same problem by Monte Carlo simulation, as will be discussed in the next subsection.

3-4   VALIDATION.

In order to validate the methodology presented in Section 3-2, Monte Carlo simulation was used to rework the illustrative problem (see Sec. 2-4). An outer loop of 1000 and an inner loop of 855 were used.

In our first simulation, all distribution models $(C, D, \bar{C}, \bar{D})$ were assumed to be lognormal, like our methodology. The results were $\bar{P} = 0.938$ and $\Delta_p = 0.0883$. Our methodology, which yielded $\bar{P} = 0.935$ and $\Delta_p = 0.0877$, is in excellent agreement. Some of the percentiles for the Q function for this simulation are indicated in Figure 3-4 by the filled circles.

In our second simulation, all distribution models were assumed to be normal to test the sensitivity of the results to the assumed distribution models. The results were $\bar{P} = 0.900$ and $\Delta_p = 0.0932$. These results were indicated by the open circles plotted in Figure 3-4. For most applications, the disparity shown in Figure 3-4 for Q greater than about 0.1 would be acceptable.

19

Table 3-1. Tabulated cumulative probability of
the normal distribution.

ξ	$\Phi(\xi)$
-3.090	0.001
-2.576	0.005
-2.326	0.010
-1.960	0.025
-1.645	0.050
-1.282	0.100
-1.036	0.150
-0.842	0.200
-0.674	0.250
-0.524	0.300
-0.385	0.350
-0.253	0.400
-0.126	0.450
0.000	0.500
0.126	0.550
0.253	0.600
0.385	0.650
0.524	0.700
0.674	0.750
0.842	0.800
1.036	0.850
1.282	0.900
1.645	0.950
1.960	0.975
2.326	0.990
2.576	0.995
3.090	0.999

*For a more extensive table, refer to a textbook or a handbook of statistics
and probability.

$$\bar{P}(C > D) \geq \Phi \left\{ \frac{\ln \frac{\bar{C}}{\bar{D}}}{\sqrt{\left(1 + T^2\right)\left(\delta_C^2 + \delta_D^2\right)}} \right\}$$
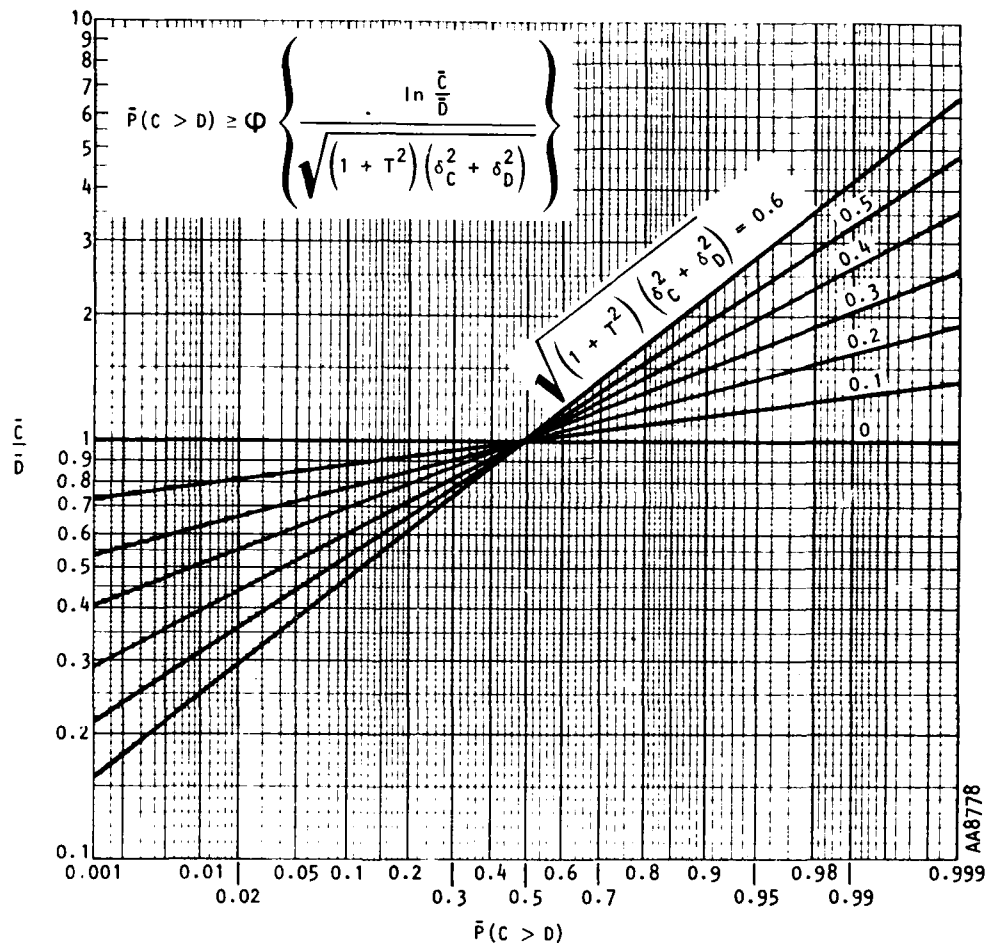
Figure 3-1.   Expected probability that capacity will exceed demand — small COV'S.

21

The figure shows a log-log chart with $\bar{P}(C>D)$ on the x-axis and Δ_P on the y-axis, with curves labeled $T = 2$, 1, 0.5, 0.3, 0.2, 0.1.

Note: $\bar{P}\Delta_P \equiv (1 - \bar{P})\Delta_{1-P}$

$$T = \sqrt{\frac{\ln\left(1 + \Delta_C^2\right)\left(1 + \Delta_D^2\right)}{\ln\left(1 + \delta_C^2\right)\left(1 + \delta_D^2\right)}}$$
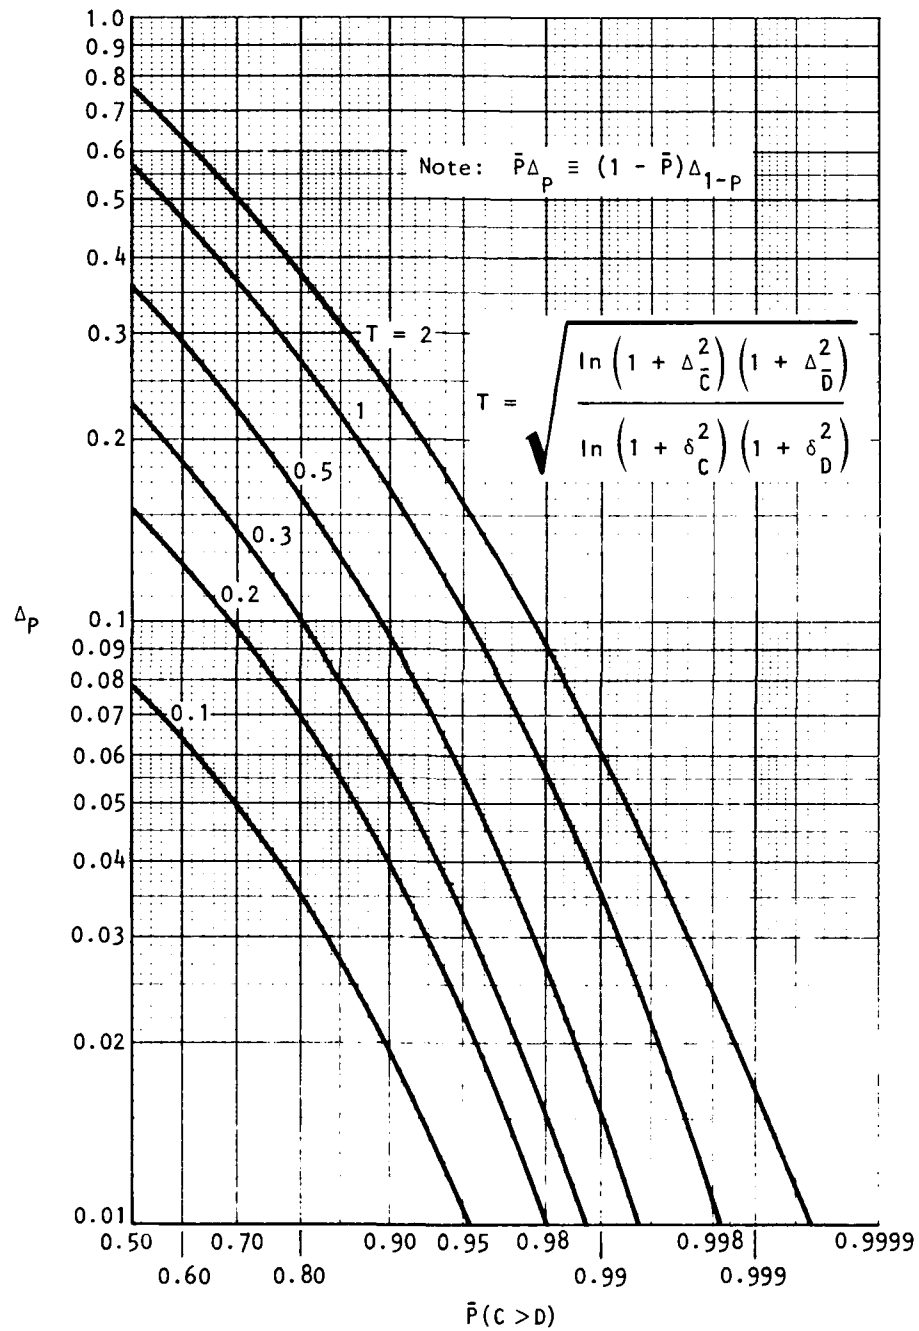
Figure 3-2. Systematic COV of $P(C > D)$.

22

$$Q\left(P > P_o\right) = \Phi\left(\frac{k_{\tilde{P}} - k_{P_o}}{T}\right)$$

Figure 3-3. Plot of Equation 3-8a for $\tilde{P} = 0.9$.

23

Figure 3-4. Illustrative problem.

SECTION 4

CAPACITY WILL EXCEED REPEATED DEMANDS

4-1   INTRODUCTION.
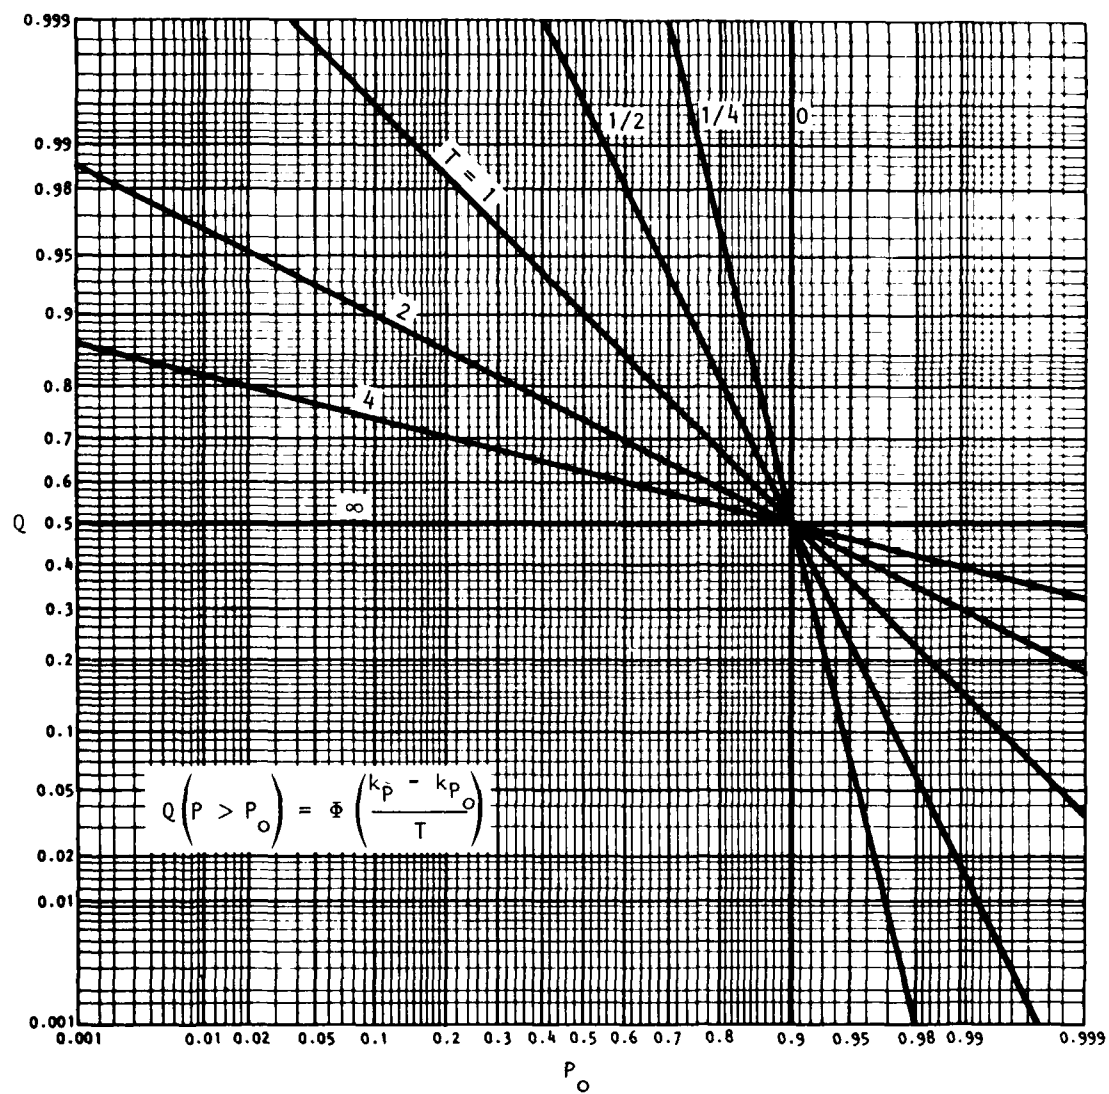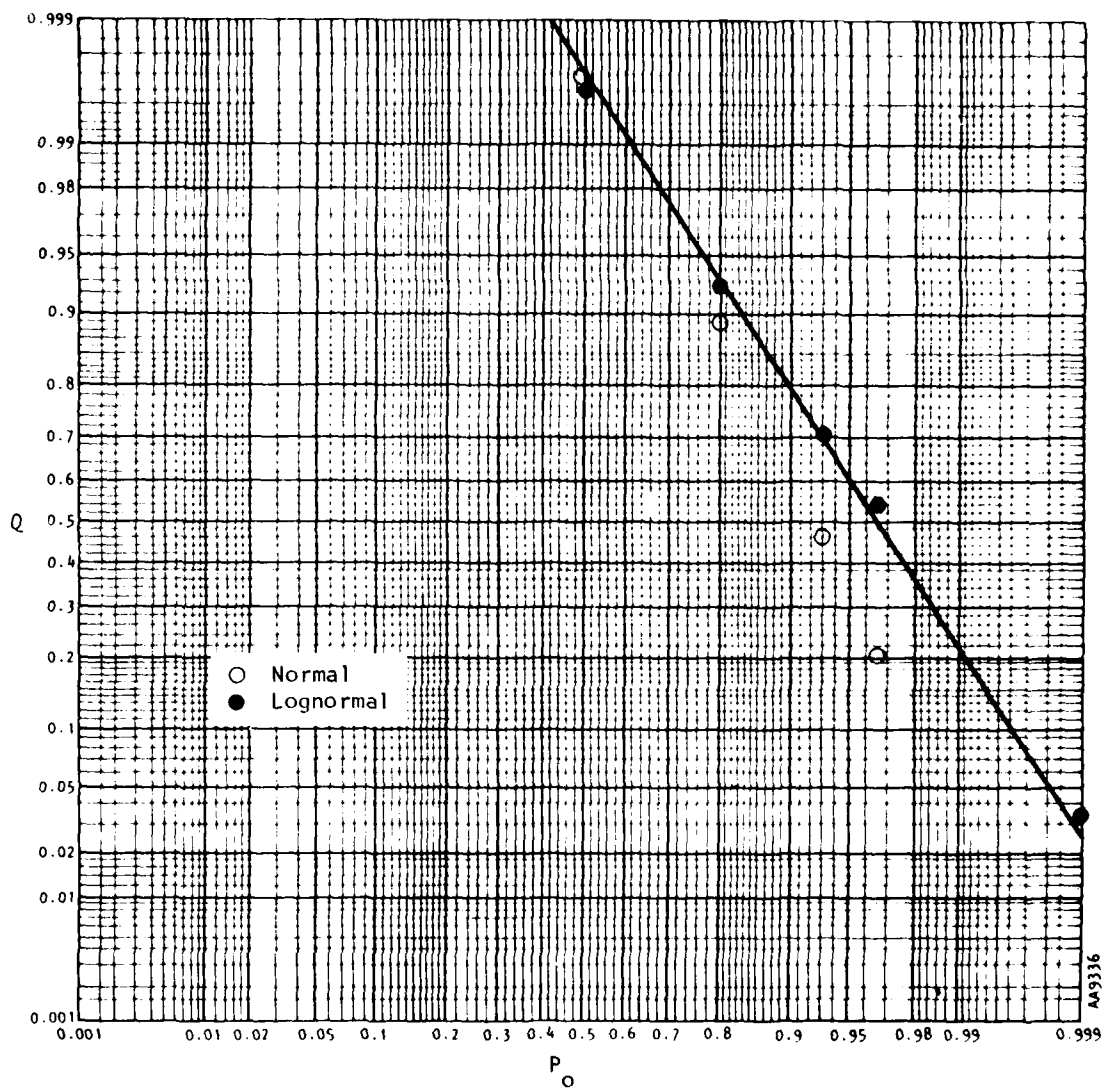
This section extends the results presented in Section 3 to the case of repeated application of demand. Capacity or demand or both may change randomly or deterministically from demand application to demand application. The set of demands may be deterministic, perfectly dependent, statistically independent, or partially dependent. All the demands of a deterministic set are known. None of the demands are known in an independent set. Given one demand, the other demands in a perfectly dependent set become deterministic. These same remarks apply to the set of capacities.

The probability that the system's capacity in a given failure mode will exceed repeated demands is shown in Table 4-1 for each of these states of dependency (after Ref. 4). For states where P is bounded and $\delta^2_{C_n}$ is either large (demands are, in effect, deterministic) or small (capacities are, in effect, deterministic) compared to $\delta^2_{D_n}$, the appropriate deterministic case is approximately correct. Figure 4-1 shows the error introduced when $\delta^2_{D_n}$ is neither large nor small compared to $\delta^2_{C_n}$. Notice that if the demand set has a common density distribution (i.e., a common mean and COV) and the capacity set has a common density distribution, the entries in Table 4-1 simplify to

$$P = P_{n'} = P_1 \tag{4-1}$$

$$P = \prod_{n=1}^{N} P_n = P_1^N \tag{4-2}$$

$$P_1^N \leq P \leq P_1 \tag{4-3}$$

Since P_n is a random variable, in the Bayesian sense (see Sec. 3), the resultant probability P is also a random variable. How to calculate P is shown below.

25

4-2   METHODOLOGY.

For those dependency states where P is equal to or can be approximated by $P_{n'}$, calculate $\bar{P}$ and Δ_P as follows:

$$\bar{P} = \bar{P}_{n'} \tag{4-4}$$

$$\Delta_P = \Delta_{P_{n'}} \tag{4-5}$$

where $\bar{P}_{n'}$ and $\Delta_{P_{n'}}$ are calculated using the information given in Section 3. For those states where P is equal to or can be approximated by $\prod\limits_{n=1}^{N} P_n$, calculate $\bar{P}$ and Δ_P as follows:

$$\bar{P} = \prod_{n=1}^{N} \bar{P}_n \tag{4-6}$$

$$\Delta_P^2 \doteq \sum_{n=1}^{N} \Delta_{P_n}^2 + \sum_{n=1}^{N} \sum_{\substack{m=1 \\ n \neq m}}^{N} \rho_{\bar{P}_n \bar{P}_m} \Delta_{P_n} \Delta_{P_m} \tag{4-7}$$

where $\bar{P}_n$ and Δ_{P_n} are calculated using the information given in Section 3, and $\rho_{\bar{P}_n \bar{P}_m}$ is the correlation coefficient for $\bar{P}_n$ and $\bar{P}_m$. When neither Equation 4-4 nor Equation 4-6 is a reasonable approximation to the truth, interpolate between the two.

The correlation coefficient $\rho_{\bar{P}_n \bar{P}_m}$ is equal to zero if $\bar{C}_n$ and $\bar{C}_m$ are independent and $\bar{D}_n$ and $\bar{D}_m$ are independent. For other dependency states, calculate $\rho_{\bar{P}_n \bar{P}_m}$ as follows:

$$\rho_{\bar{P}_n \bar{P}_m} \doteq \frac{\rho_{\bar{C}_n \bar{C}_m} \sqrt{\ln\left(1 + \Delta_{\bar{C}_n}^2\right)\ln\left(1 + \Delta_{\bar{C}_m}^2\right)} + \rho_{\bar{D}_n \bar{D}_m} \sqrt{\ln\left(1 + \Delta_{\bar{D}_n}^2\right)\ln\left(1 + \Delta_{\bar{D}_m}^2\right)}}{\sqrt{\ln\left(1 + \Delta_{\bar{C}_n}^2\right)\left(1 + \Delta_{\bar{D}_n}^2\right)\ln\left(1 + \Delta_{\bar{C}_m}^2\right)\left(1 + \Delta_{\bar{D}_m}^2\right)}} \tag{4-8}$$

Calculate $Q(P > P_o)$ using Equation 3-8, where T is obtained by entering Figure 3-2 with $\bar{P}$ and Δ_p. Note that for $P \neq P_{n'}$, $Q(P > P_o)$ is approximate and T has no physical meaning.

4-3   ILLUSTRATIVE USE.

Calculate the probability (P_o vs. Q) that the system's capacity in a given failure mode will exceed four applications of demand. Assume C_1, C_2, C_3, and C_4 are statistically independent, but have a common distribution function. Assume the same independence and commonality for the demands and the expected demands. However, assume that the expected capacities are perfectly dependent. Assume[*]

$$\bar{C} = 1.28 \qquad \delta_D = 0.21$$

$$\bar{D} = 0.55 \qquad \Delta_{\bar{C}} = 0.16$$

$$\delta_C = 0.39 \qquad \Delta_{\bar{D}} = 0.24$$

From Table 4-1, we know that

$$P = \prod_{n=1}^{n} P_n = P_1 P_2 P_3 P_4$$

From Section 3-3, we know that

$$\bar{P}_1 = \bar{P}_2 = \bar{P}_3 = \bar{P}_4 = 0.935$$

$$\Delta_{P_1} = \Delta_{P_2} = \Delta_{P_3} = \Delta_{P_4} = 0.0855$$

---

[*]Note: these are the same parameters used in Section 3-3.

27

Substituting into Equations 4-6 and 4-7 yields

$$\bar{P} = 0.935^4 = 0.764$$

$$\Delta_P^2 = 4 \times 0.0877^2 + 12 \times \rho_{\bar{P}_n \bar{P}_m} \times 0.0877^2$$

The correlation coefficient $\rho_{\bar{P}_n \bar{P}_m}$ is calculated using Equation 4-7 with $\rho_{\bar{D}_n \bar{D}_m} = 0$ and $\rho_{\bar{C}_n \bar{C}_m} = 1.0$. Equation 4-7 yields $\rho_{\bar{P}_n \bar{P}_m} = 0.311$ and Δ_P becomes 0.244, upon substitution for $\rho_{\bar{P}_n \bar{P}_m}$.

Entering Figure 3-2 with $\Delta_P = 0.244$ and $\bar{P} = 0.764$ yields $T = 0.7$. Entering Equation 3-8 with $T = 0.7$ and $\bar{P} = 0.764$ gives

$$Q = \phi \left(\frac{0.72 \sqrt{1 + 0.7^2} - k_{P_o}}{0.7} \right)$$

$$= \phi \left(\frac{0.88 - k_{P_o}}{0.7} \right)$$

P_o	Q
0.5	0.90
0.81	0.5

The straight line shown in Figure 4-2 was constructed from the above data.

4-4   VALIDATION.

In order to validate the methodology presented in Section 4, Monte Carlo simulation was used to rework the illustrative problem. An outer loop of 139 and an inner loop of 855 was used. All distributions were assumed to be lognormal. The results were $\bar{P} = 0.783$ and $\Delta_P = 0.202$. Some of the percentiles for the Q function are shown in Figure 4-2 as the filled circles. The agreement between the two solutions is reasonably good.
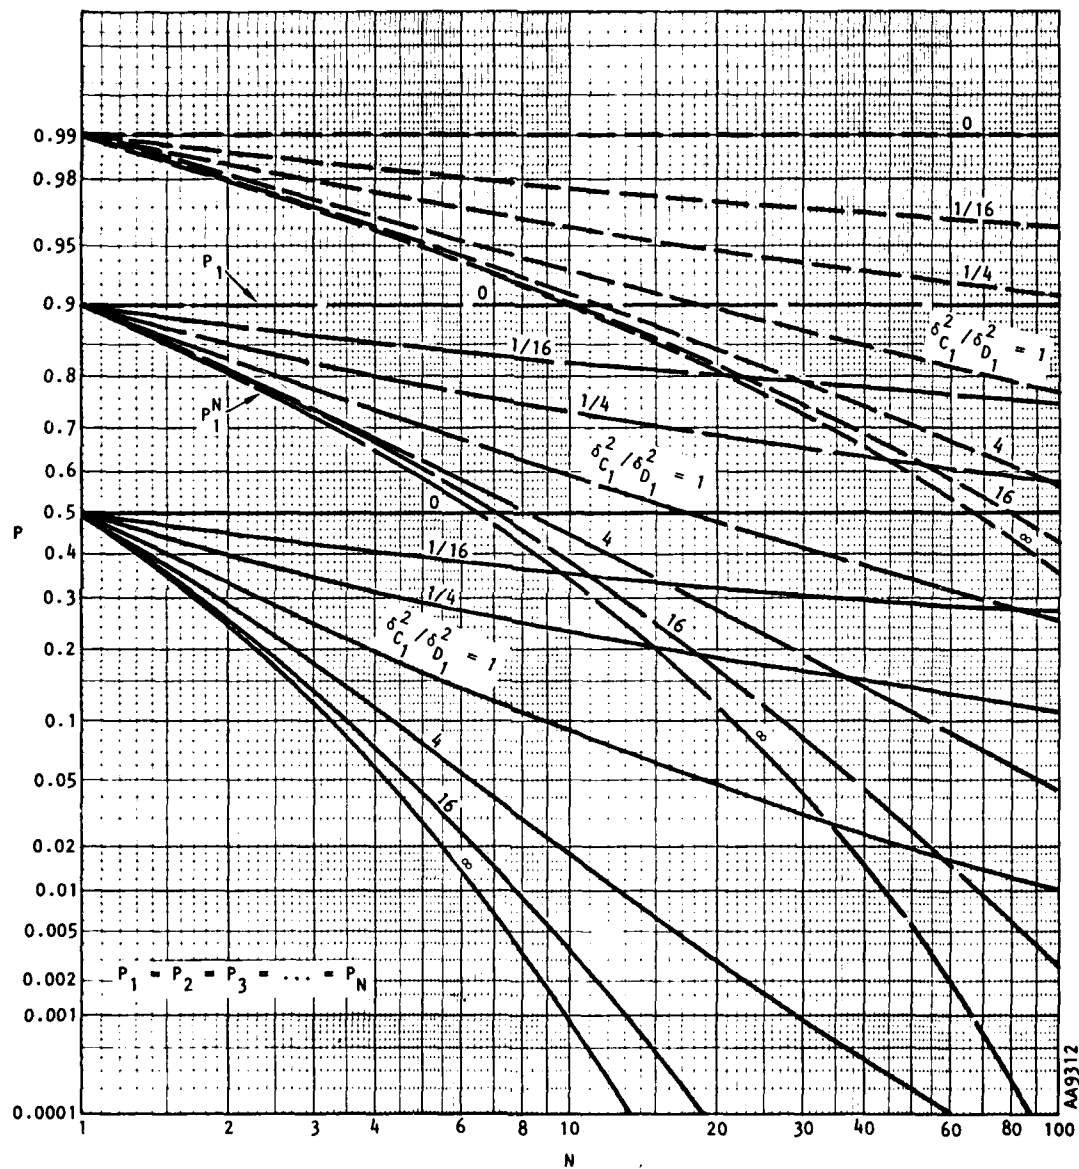
Table 4-1. Probability that capacity will exceed N demands: One failure mode

Demands	Capacities			
	Deterministic	Perfectly Dependent	Statistically Independent	Unknown Dependency
Deterministic	$P = P_{n'}$	$P = P_{n'}$	$P = \prod\limits_{n=1}^{N} P_n$	$\prod\limits_{n=1}^{N} P_n \le P \le P_{n'}$
Perfectly Dependent	$P = P_{n'}$	$P = P_{n'}$	$\prod\limits_{n=1}^{N} P_n \le P \le P_{n'}$	$\prod\limits_{n=1}^{N} P_n \le P \le P_{n'}$
Statistically Independent	$P = \prod\limits_{n=1}^{N} P_n$	$\prod\limits_{n=1}^{N} P_n \le P \le P_{n'}$	$P = \prod\limits_{n=1}^{N} P_n$	$\prod\limits_{n=1}^{N} P_n \le P \le P_{n'}$
Unknown Dependency	$\prod\limits_{n=1}^{N} P_n \le P \le P_{n'}$	$\prod\limits_{n=1}^{N} P_n \le P \le P_{n'}$	$\prod\limits_{n=1}^{N} P_n \le P \le P_{n'}$	$\prod\limits_{n=1}^{N} P_n \le P \le P_{n'}$

Note: 1. $P_n = P(C_n > D_n)$

2. $P_{n'}$ is the smallest probability in the set $P_1, P_2, P_3, \ldots, P_n, P_{n'}, \ldots, P_N$

29

(a) Statistically independent capacities
and perfectly dependent demands

Figure 4-1. Probability that capacity will exceed repeated
demands: One failure mode.
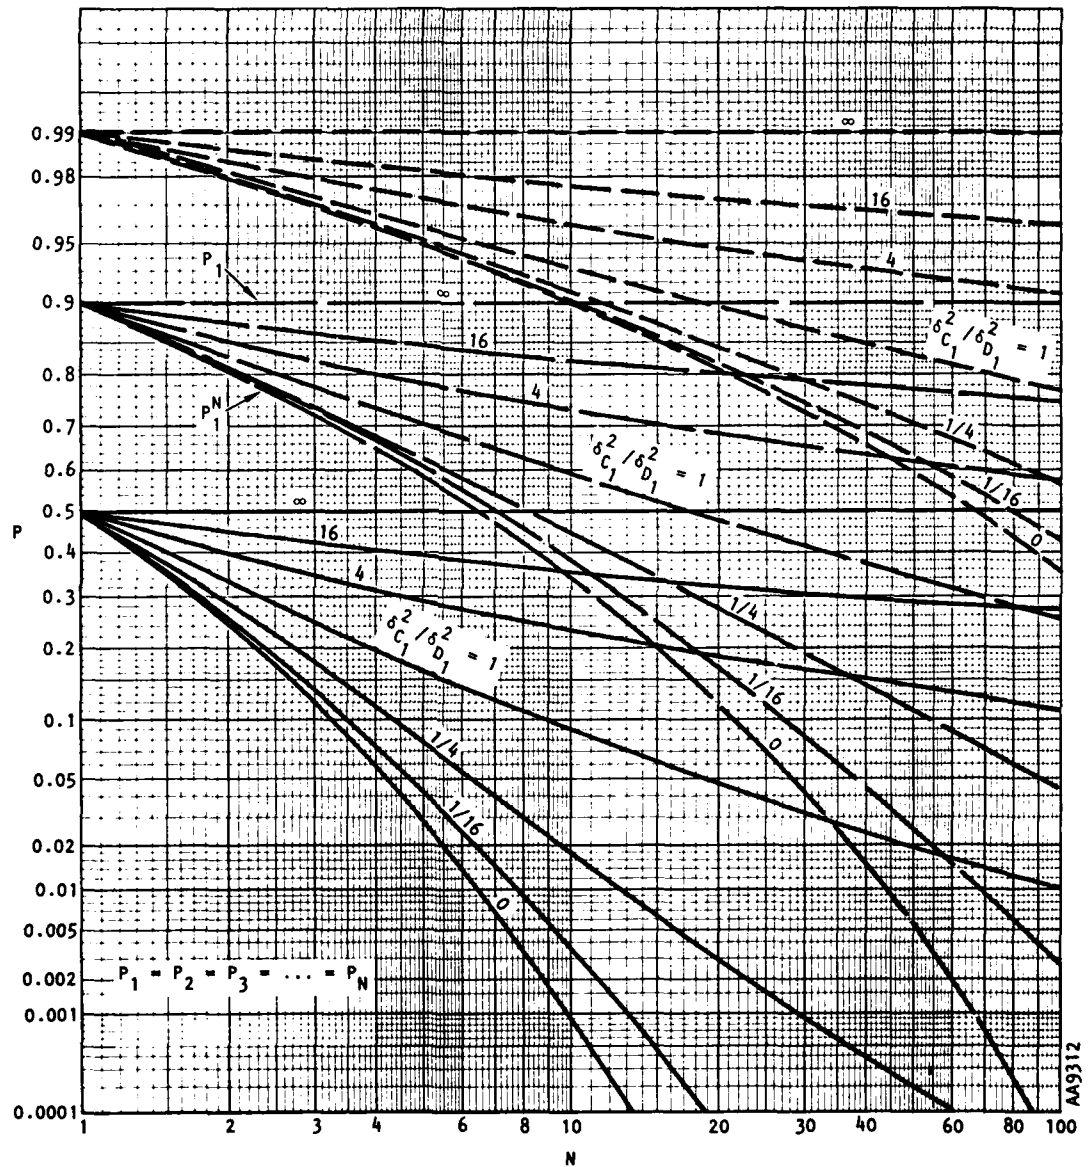
(b) Perfectly dependent capacities and
statistically independent demands
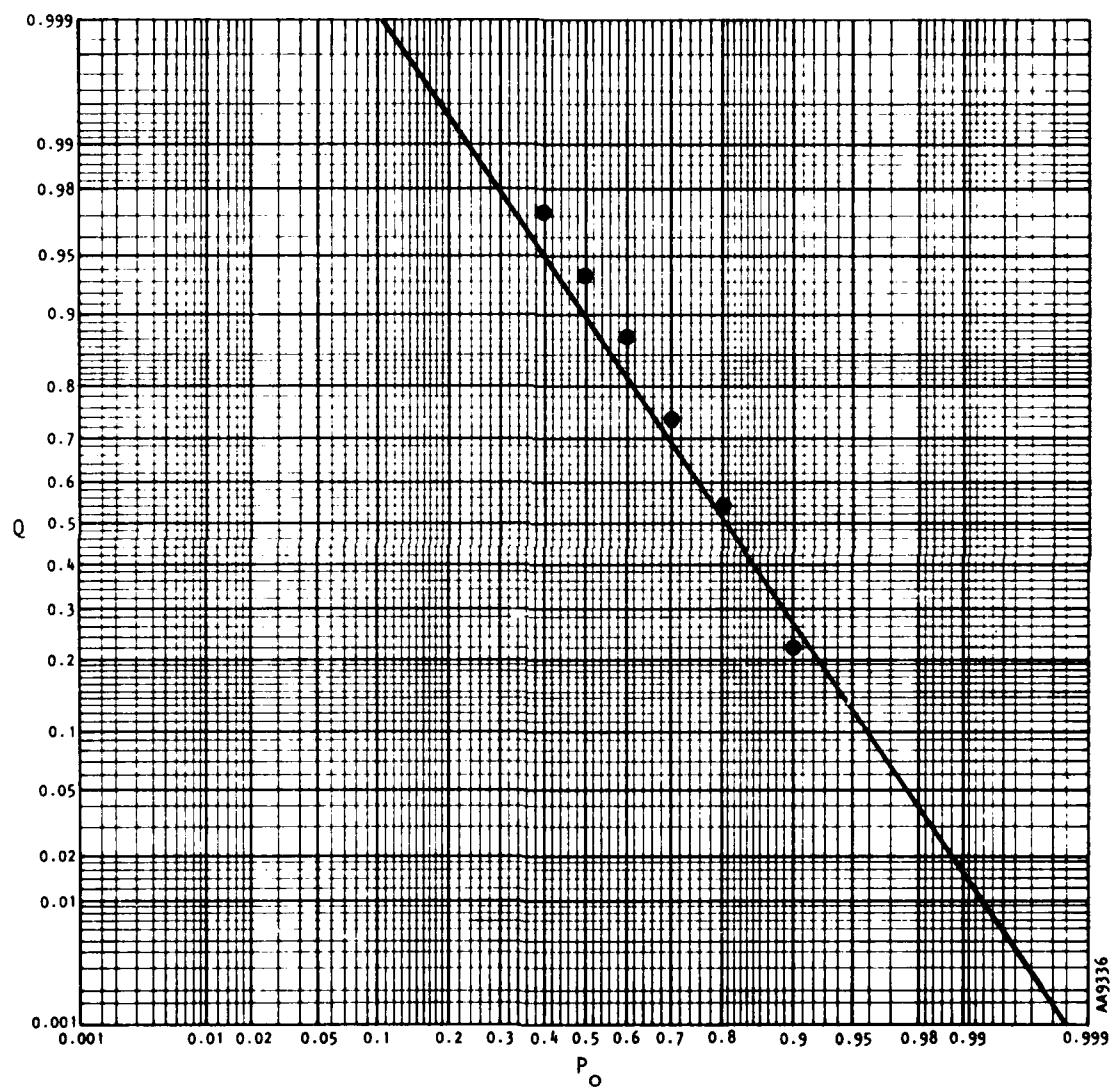
Figure 4-1. (Concluded).

Figure 4-2. Illustrative problem.

SECTION 5

FAILURE-MODE SETS

This section extends the results presented in Section 3 to a set of failure modes. Only one application of demand per failure mode is considered. Capacity or demand or both may change randomly or deterministically from failure mode to failure mode. The set of capacities may be deterministic, perfectly dependent, statistically independent, or partially dependent. All the capacities of a deterministic set are known. None of the capacities of an independent set are known. Given one capacity, the other capacities in a perfectly dependent set become deterministic. The same remarks apply to the set of demands.

The probability that all the capacities in an M-failure-mode set will exceed their demands is shown in Table 5-1 for each of these states of dependency (after Ref. 4). Noting the similarity between Tables 4-1 and 5-1, we conclude that the methodology presented in Section 4 for a system responding in a given failure mode to N repeated demands is, with a simple change of notation, also applicable for an M-failure-mode set.

Table 5-1. Probability that capacity will exceed demand for each of M failure modes: One application of the demands

Mode Demands	Mode Capacities			
	Deterministic	Perfectly Dependent	Statistically Independent	Unknown Dependency
Deterministic		$P = P_{m'}$	$P = \prod_{m=1}^{M} P_m$	$\prod_{m=1}^{M} P_m \leq P \leq P_{m'}$
Perfectly Dependent	$P = P_{m'}$	$P = P_{m'}$	$\prod_{m=1}^{M} P_m \leq P \leq P_{m'}$	$\prod_{m=1}^{M} P_m \leq P \leq P_{m'}$
Statistically Independent	$P = \prod_{m=1}^{M} P_m$	$\prod_{m=1}^{M} P_m \leq P \leq P_{m'}$	$P = \prod_{m=1}^{M} P_m$	$\prod_{m=1}^{M} P_m \leq P \leq P_{m'}$
Unknown Dependency	$\prod_{m=1}^{M} P_m \leq P \leq P_{m'}$	$\prod_{m=1}^{M} P_m \leq P \leq P_{m'}$	$\prod_{m=1}^{M} P_m \leq P \leq P_{m'}$	$\prod_{m=1}^{M} P_m \leq P \leq P_{m'}$

Note: 1. $P_m = P(C_m > D_m)$

2. $P_{m'}$ is the smallest probability in the set $P_1, P_2, P_3, \ldots, P_m, \ldots, P_M$

SECTION 6

ASSESSMENT

6-1   INTRODUCTION.

You will be faced either with assessing (synthesizing) the probability of mission success of an existing system or with allocating the probability of mission success to the failure modes of an evolving system. The former task, which is by far the easier of the two, is addressed here. The task of allocating the probability of mission success is addressed in Section 7.

6-2   METHODOLOGY.

Follow these eight steps to assess the probability of mission success of an existing or defined system:

1.   Develop demand scenarios. Complete Steps 2 through 7 for each scenario.

2.   Identify the system's failure modes.

3.   Calculate the system's demand applied in each failure mode.

4.   Calculate the system's capacity in each failure mode.

5.   Calculate the probability of no failure of the system in each failure mode.

6.   Construct the series-parallel network of no-failure probabilities.

7.   Calculate PMS vs. Q.

8.   Draw PMS vs. Q envelope.

What each of these eight steps entails is outlined below.

6-2.1   Step 1: Develop Demand Scenarios.

Exercise demand options (if any) to develop demand scenarios. Complete Steps 2 through 7 for each scenario.

6-2.2   Step 2:   Identify Failure Modes.

Identify all the failure modes of the system that can abort the mission.
This task will be made easier if the system failure modes are categorized and each
category is addressed in turn.

6-2.3   Step 3:   Calculate Demand.

Using the methodology presented in Section 2, calculate the mean, random COV,
and systematic COV of the demand that is applied to the system in each failure mode
identified in Step 2. If the system is subject to repeated demand application, calcu-
late the demand descriptors for each application.

6-2.4   Step 4:   Calculate Capacity.

Using the methodology presented in Section 2, calculate the mean, random COV,
and systematic COV of the capacity of the system in each identified failure mode.   If
the system is subject to repeated demand application and the capacity changes from
demand to demand, calculate the capacity descriptors for each demand.

6-2.5   Step 5:   Calculate Probability of No Failure.

Using the methodology presented in Sections 3 and 4, calculate the expected
probability of no failure of the system and its associated systematic COV in each
identified failure mode. Account for repeated demand applications, as required.

6-2.6   Step 6:   Construct System Network.

Construct the series-parallel network of the system failure mode probabili-
ties.   (Note that the expected values and systematic COVs of these probabilities were
calculated in Step 5.) Do this by grouping the failure modes into sets such that
within each set it can be reasonably assumed that there is perfect dependency; between
sets, it can be reasonably assumed that there is statistical independence. Accomplish
this step under the assumption that there is zero systematic uncertainty throughout the
system.

6-2.2   Step 2:   Identify Failure Modes.

Identify all the failure modes of the system that can abort the mission. This task will be made easier if the system failure modes are categorized and each category is addressed in turn.

6-2.3   Step 3:   Calculate Demand.

Using the methodology presented in Section 2, calculate the mean, random COV, and systematic COV of the demand that is applied to the system in each failure mode identified in Step 2. If the system is subject to repeated demand application, calculate the demand descriptors for each application.

6-2.4   Step 4:   Calculate Capacity.

Using the methodology presented in Section 2, calculate the mean, random COV, and systematic COV of the capacity of the system in each identified failure mode. If the system is subject to repeated demand application and the capacity changes from demand to demand, calculate the capacity descriptors for each demand.

6-2.5   Step 5:   Calculate Probability of No Failure.

Using the methodology presented in Sections 3 and 4, calculate the expected probability of no failure of the system and its associated systematic COV in each identified failure mode. Account for repeated demand applications, as required.

6-2.6   Step 6:   Construct System Network.

Construct the series-parallel network of the system failure mode probabilities. (Note that the expected values and systematic COVs of these probabilities were calculated in Step 5.) Do this by grouping the failure modes into sets such that within each set it can be reasonably assumed that there is perfect dependency; between sets, it can be reasonably assumed that there is statistical independence. Accomplish this step under the assumption that there is zero systematic uncertainty throughout the system.

36

6-2.7 Step 7: Calculate PMS.

The system's probability of mission success (PMS) is calculated in a manner similar to the calculation of capacity or demand (see Sec. 2). Accordingly, the actual PMS is represented by

$$PMS = g(P_1, \ldots, P_j, \ldots, P_J) \tag{6-1}$$

where P_j is the actual probability of no failure of the system in the $j\underline{th}$ set of failure mode probabilities identified in Step 6. The first-order approximation of the expected value of PMS is simply[*]

$$\overline{PMS} \doteq g(\bar{P}_1, \ldots, \bar{P}_j, \ldots, \bar{P}_J) \tag{6-2}$$

where $\bar{P}_j$ is the expected probability of P_j calculated in Step 5 and the function g is the mathematical equivalent of the series-parallel arrangement of P_1, P_2, P_3,... constructed in Step 5. Calculate $\overline{PMS}$ using the well-known rules for manipulating series-parallel arrangements of independent probability events.

Calculate the systematic COV of PMS (i.e., the COV of $\overline{PMS}$) using

$$\Lambda_{PMS}^2 \doteq \Lambda_g^2 + \sum_{j=1}^{J} \left(\frac{\bar{P}_j}{\overline{PMS}}\right)^2 \left(\frac{\partial g}{\partial \bar{P}_j}\right)^2 \Lambda_{P_j}^2 + \sum_{i=1}^{J} \sum_{\substack{j=1 \\ i \neq j}}^{J} \frac{\bar{P}_i \bar{P}_j}{PMS^2} \frac{\partial g}{\partial \bar{P}_i} \frac{\partial g}{\partial \bar{P}_j} \rho_{\bar{P}_i \bar{P}_j} \Lambda_{P_i} \Lambda_{P_j} \tag{6-3}$$

where the partial derivatives are to be evaluated at $\bar{P}_1$, $\bar{P}_2$, $\bar{P}_3$,...; Λ_{P_j} is the systematic COV of P_j calculated in Step 5; Λ_g is the systematic COV associated with the modeling error in your network; and $\rho_{\bar{P}_i \bar{P}_j}$ is the correlation coefficient for $\bar{P}_i$ and $\overline{P_j}$. Calculate $\rho_{\bar{P}_i \bar{P}_j}$ using Equation 4-8.

Finally, calculate your confidence that PMS exceeds PMS_o using

$$Q(PMS > PMS_o) \doteq \Phi\left(\frac{k_{\overline{PMS}} \sqrt{1 + T^2} - k_{PMS_o}}{T}\right) \tag{6-4}$$

---

[*]Add the second-order terms as required.

37

Obtain T by entering Figure 3-2 with $\overline{PMS}$ in place of P, and Δ_{PMS} in place of Δ_p.[*]
Note that Equation 6-4 plots as a straight line in normal-normal probability space.

6-2.8   Step 8: Draw PMS Envelope.

Using the results of Step 7, plot the PMS_o vs. Q line for each demand
scenario on lognormal-lognormal probability paper. The left-most envelope of these
lines is the sought-after probability of mission success vs. confidence relationship
for the particular mission under consideration (see Fig. 6-1).

6-3   ILLUSTRATIVE USE.

The seventh step of the above methodology is illustrated below for the system
network shown in Figure 6-2 and for

$$\overline{P}_1 = 0.99$$

$$\overline{P}_2 = \overline{P}_3 = 0.9$$

$$\overline{P}_4 = 0.95$$

$$\Delta_{P_1} = 0.04$$

$$\Delta_{P_2} = \Delta_{P_3} = 0.1$$

$$\Delta_{P_4} = 0.02$$

$$\Delta_{\overline{q}} = 0.02$$

$$\rho_{\overline{P}_2\overline{P}_3} = \rho_{\overline{P}_3\overline{P}_2} = 1.0$$

All other $\rho = 0.0$

---

[*] T has no physical meaning for systems comprising two or more independent failure modes.

Calculate PMS using Equation 6-1:

$$PMS = P_3P_4 + P_1P_2P_4 - P_1P_2P_3P_4$$

Calculate $\overline{PMS}$ using Equation 6-2:

$$\overline{PMS} = \bar{P}_3\bar{P}_4 + \bar{P}_1\bar{P}_2\bar{P}_4 - \bar{P}_1\bar{P}_2\bar{P}_3\bar{P}_4$$

$$= 0.94$$

Calculate the partial derivatives in Equation 6-3:

$$\left.\frac{\partial PMS}{\partial P_1}\right|_0 = \bar{P}_2\bar{P}_4 - \bar{P}_2\bar{P}_3\bar{P}_4 = 0.0855$$

$$\left.\frac{\partial PMS}{\partial P_2}\right|_0 = \bar{P}_1\bar{P}_4 - \bar{P}_1\bar{P}_3\bar{P}_4 = 0.0941$$

$$\left.\frac{\partial PMS}{\partial P_3}\right|_0 = \bar{P}_4 - \bar{P}_1\bar{P}_2\bar{P}_4 = 0.1036$$

$$\left.\frac{\partial PMS}{\partial P_4}\right|_0 = \bar{P}_3 + \bar{P}_1\bar{P}_2 - \bar{P}_1\bar{P}_2\bar{P}_3 = 0.9891$$

Substituting the above partials into Equation 6-3 yields

$$\Lambda^2_{PMS} = 0.02^2 + \left(\frac{0.99}{0.94}\right)^2 0.0855^2 \times 0.04^2 + \left(\frac{0.9}{0.94}\right)^2 0.0941^2 \times 0.1^2$$

$$+ \left(\frac{0.9}{0.94}\right)^2 0.1036^2 \times 0.1^2 + \left(\frac{0.95}{0.94}\right)^2 0.9891^2 \times 0.02^2$$

$$+ 2\frac{0.9 \times 0.9}{0.91 \times 0.94} 0.0941 \times 0.1036 \times 0.1 \times 0.1$$

$$= 0.034^2$$

Determine T by entering Figure 3-2 with $\overline{PMS} = 0.94$ and $\Delta_{PMS} = 0.034$:

$$T = 0.28$$

Finally, use Equation 6-4 to obtain the solid line plotted in Figure 6-2.

6-4 VALIDATION.

In order to validate the methodology presented in Section 6-2, the illustrative problem presented in Section 6-3 was reworked using binomial models as a basis for simulation. This simulation technique is explained below.

If $\bar{P}_i$ denotes the population mean and Δ_{P_i} denotes the coefficient of variation of an estimate (mean) from a sample of size N_i from the ith population, then

$$(1 - \bar{P}_i) / \bar{P}_i N_i = \Delta_{P_i}^2$$

Thus, from the problem input (Sec. 6-3), we infer

$$N_1 = 6.31 \doteq 6$$

$$N_2 = 11.11 \doteq 11$$

$$N_3 = 11.11 \doteq 11$$

$$N_4 = 131.58 \doteq 132$$

For each set of possible sample outcomes (S_1, S_2, S_3, S_4), where S_i denotes the number of successes in N_i trials, the system reliability estimate will be given by

$$PMS = P_3 P_4 + P_1 P_2 P_4 - P_1 P_2 P_3 P_4$$

where

$$P_i = S_i / N_i$$

40

The probability of this PMS value is given by

$$\prod_{i=1,2,4} \binom{N_i}{S_i} \bar{P}_i^{S_i} (1 - \bar{P}_i)^{N_i - S_i}$$

where

$$\binom{N_i}{S_i} = N_i! / S_i! (N_i - S_i)!$$

Note that the $i = 3$ term is ignored in the cell probability, since $\rho_{\bar{P}_2 \bar{P}_3} = 1.0$ (i.e., $S_2 = S_3$).

This binomial model yields $\overline{PMS} = 0.932$ and $\Delta_{PMS} = 0.0348$. (Our methodology yielded $\overline{PMS} = 0.94$ and $\Delta_{PMS} = 0.034$.) Some of the percentiles for the Q function for this model are indicated in Figure 6-2 by the filled circles. Although the Q curve for the binomial model is not linear, the agreement with the presented methodology is reasonably good.

The general remarks about the applicable domain made in Sections 2-4 and 3-4 also apply here.
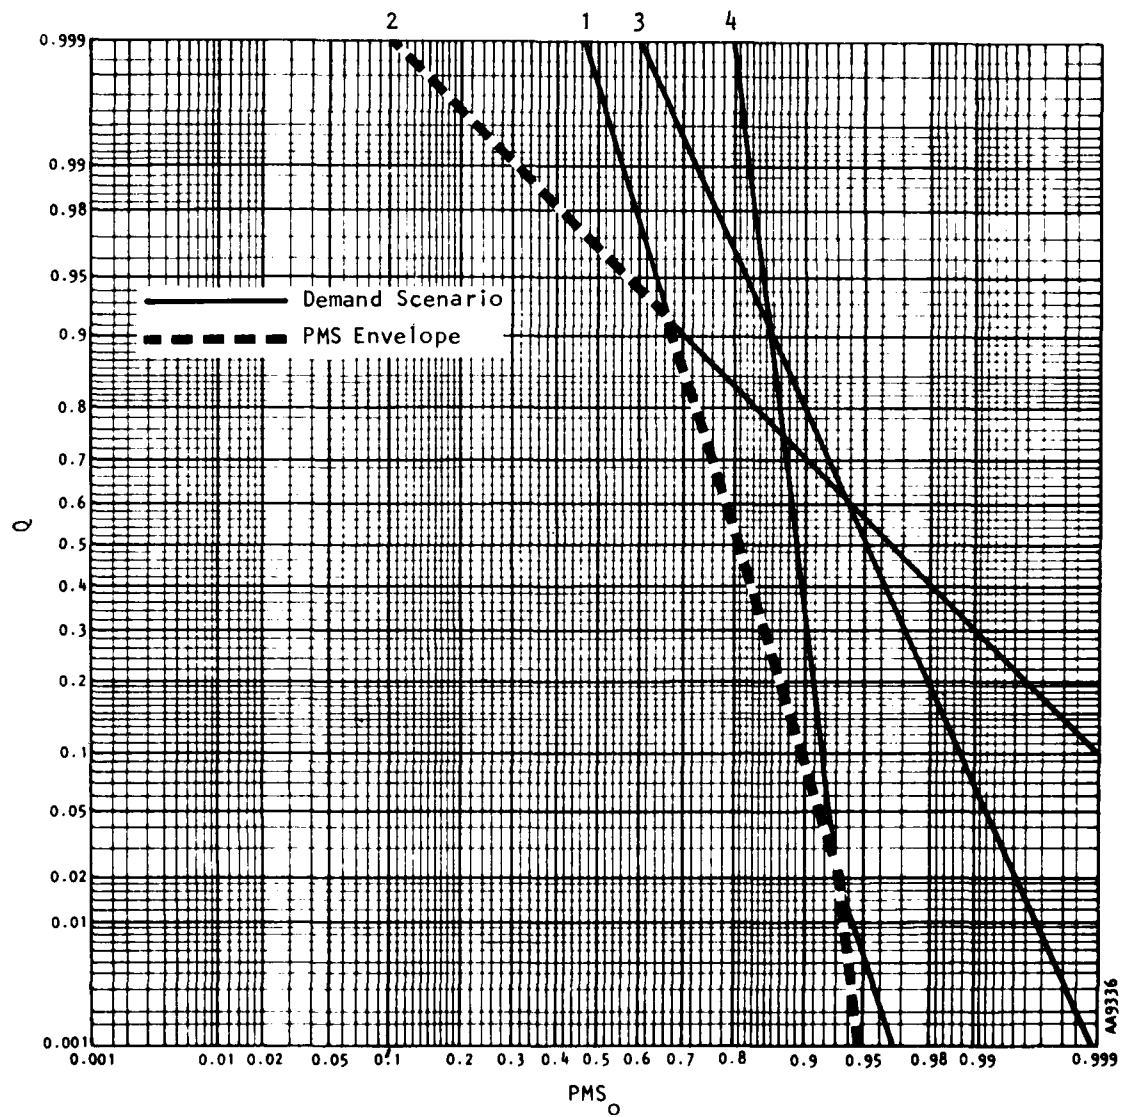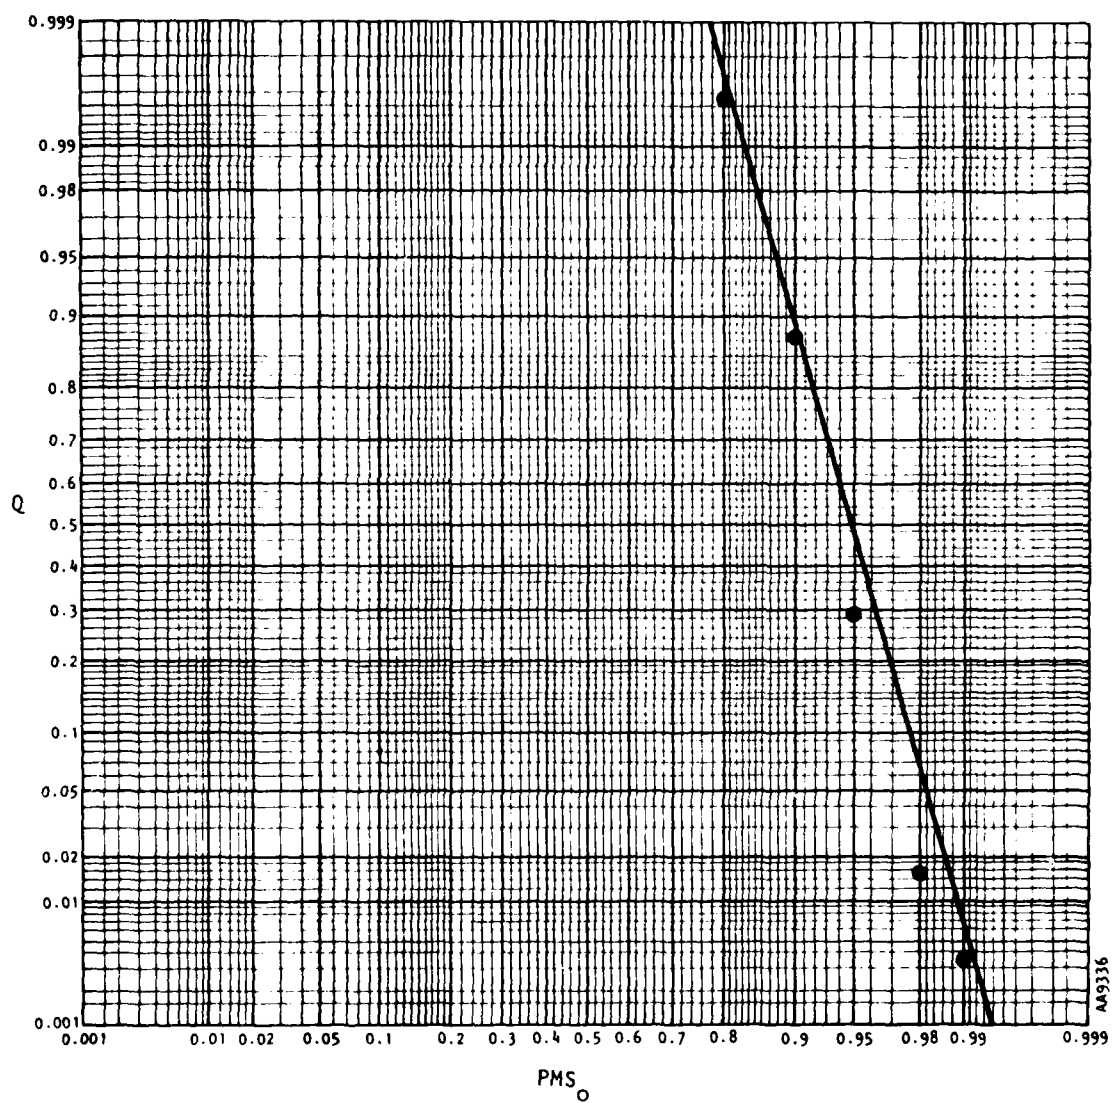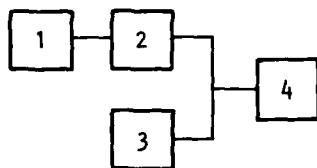
Figure 6-1.   Probability-of-Mission-Success envelope.

Figure 6-2. Illustrative problem.

43

SECTION 7

ALLOCATION

7-1   INTRODUCTION.

The reverse of assessment of the probability of mission success (PMS) of an existing system is the allocation of the PMS to the failure modes of an evolving system. Although, in concept, allocation is the reverse of assessment, the methodologies by which each is achieved are quite similar, as will be seen in this section.

7-2   METHODOLOGY.

Follow these 11 steps to allocate the probability of mission success (PMS):

1.   Develop demand scenarios. Complete Steps 2 through 9 for each scenario.

2.   Identify the system failure modes.

3.   Calculate the system's demand applied in each failure mode.

4.   Construct the series-parallel network of no-failure probabilities.

5.   Select a trial value of $\overline{PMS}$.

6.   Allocate $\overline{PMS}$ to each failure mode.

7.   Calculate for each failure mode the mean capacity required to satisfy the allocated share of the $\overline{PMS}$.

8.   Calculate Δ_{PMS}, the systematic uncertainty of $\overline{PMS}$.

9.   Calculate $\overline{PMS}$. Repeat Steps 5 through 9 until the final and calculated $\overline{PMS}$'s are acceptably close.

10.   Identify the critical mean capacity in each failure mode.

11.   Write, for each failure mode, the deterministic design specification for the identified critical mean capacity.

Steps 1, 2, 3, and 4 are identical to the first four steps of assessment (see Sec. 6). Steps 8 and 10 have their counterparts in assessment and need not be discussed. Steps 5 6, 7, 9, and 11, however, are unique to allocation. Step 11 requires no explanation.

7-2.1   Step 5.

Select a trial value of the *expected* probability of mission success, $\overline{PMS}$. Solving Equation 6-4 for $\overline{PMS}$ and finding its maximum and minimum values with respect to T yield these bounds:

$$PMS_o \leq \overline{PMS} \leq \Phi \left(\sqrt{k^2_{PMS_o} + k^2_Q} \right) \tag{7-1}$$

where the probability that the system will successfully complete the mission is at least PMS_o, stated with Q confidence. Use Equation 7-1, with criteria PMS_o and Q, as an aid in selecting a trial value of $\overline{PMS}$.

7-2.2   Step 6.

The crux of Step 6 is to allocate the $\overline{PMS}$ in such a way that maximum cost effectiveness is achieved for the system. In general, this optimum state will be achieved by allocating the largest shares of the $\overline{PMS}$ to those failure modes that exhibit the smallest cost increments per share of the $\overline{PMS}$, and vice versa. See Reference 5 for an introduction to optimizing allocations.

7-2.3   Step 7.

Calculate for each failure mode the mean capacity required to satisfy the allocated share of the $\overline{PMS}$. Use Equation 3-9.

7-2.4   Step 9.

Calculate $\overline{PMS}$ using the following manipulated form of Equation 6-4:

$$\overline{PMS} = \Phi \left(\frac{Tk_Q + k_{PMS_o}}{\sqrt{1 + T^2}} \right) \tag{7-2}$$

where T is obtained by entering Figure 3-2 with the trial value of $\overline{PMS}$ and the Δ_{PMS} calculated in Step 3, and PMS_o and Q are given criteria values. Repeat Steps 5 through 9 until the trial and calculated $\overline{PMS}$'s are acceptably close.

7-3   ILLUSTRATIVE USE.

The following example illustrates Steps 5, 6, 7, and 9. Validation of this example is not necessary.

Step 1.

Only one demand scenario is assumed applicable for purposes of this illustrative example.

Step 2.

Only two failure modes are assumed significant.

Step 3.

Assume that we have determined the following demands for Failure Modes 1 and 2:

$$\bar{D}_1 = 28 \text{ units} \qquad \bar{D}_2 = 13 \text{ units}$$

$$\delta_{D_1} = 0.18 \qquad \delta_{D_2} = 0.20$$

$$\Delta_{\bar{D}_1} = 0.15 \qquad \Delta_{\bar{D}_2} = 0.06$$

Step 4.

The two failure modes are assumed to be in series.

Step 5.

Assumed criteria

$$PMS_o = 0.5$$

$$Q = 0.9$$

Therefore, from Equation 7-1, we obtain

$$0.5 \leq \overline{PMS} \leq 0.9$$

Try $\overline{PMS} = 0.7$

<u>Steps 6 and 7.</u>

Assume, for purposes of this illustrative example, that

$$Cost \propto \bar{C}_1 + \bar{C}_2,$$

where $\bar{C}_1$ and $\bar{C}_2$ are the expected capacities of the system in Failure Modes 1 and 2, respectively. Moreover, assume that we have determined that

$$\delta_{C_1} = 0.09 \qquad\qquad \delta_{C_2} = 0.18$$

$$\Delta_{\bar{C}_1} = 0.15 \qquad\qquad \Delta_{\bar{C}_2} = 0.12$$

Equation 3-3a yields $T_1 = 1.0$ and $T_2 = 0.5$. Equation 3-9a yields

$$\bar{C}_1 = 28 \exp(0.29 \, k_{\bar{P}_1})$$

$$\bar{C}_2 = 13 \exp(0.30 \, k_{\bar{P}_2})$$

Thus,

$$Cost \propto 28 \exp(0.29 \, k_{\bar{P}_1}) + 13 \exp(0.30 \, k_{\bar{P}_2})$$

For $\overline{PMS} = \bar{P}_1 \bar{P}_2 = 0.7$, it can be verified that cost is approximately minimized for $\bar{P}_1 = 0.78$ and $\bar{P}_2 = 0.90$. Thus, $\bar{C}_1 = 35$ units and $\bar{C}_2 = 19$ units.

<u>Step 8.</u>

Entering Figure 3-2 with $T_1 = 1$ and $\bar{P}_1 = 0.78$ yields $\Delta_{P_1} = 0.27$. In a similar fashion we find $\Delta_{P_2} = 0.094$. From Equation 6-3,

$$\Delta^2_{\overline{PMS}} = \Delta^2_{P_1} + \Delta^2_{P_2} = 0.27^2 + 0.094^2 = 0.286^2$$

<u>Step 9.</u>

Entering Figure 3-2 with $\Delta_{PMS} = 0.286$ and $\overline{PMS} = 0.7$ yields $T = 0.7$. Finally, Equation 7-2 yields

$$\overline{PMS} = \Phi \left[\frac{0.7 \times 0 + 1.282}{\sqrt{1 + 0.7^2}} \right] = 0.85 \neq 0.7$$

<u>Step 5a.</u>

Try $\overline{PMS} = 0.85$.

<u>Steps 6a and 7a.</u>

For $\overline{PMS} = 0.85$, $\bar{P}_1 = 0.90$ and $\bar{P}_2 = 0.94$ approximately minimize cost. Thus, $\bar{C}_1 = 41$ units and $\bar{C}_2 = 21$ units.

<u>Step 8a.</u>

Entering Figure 3-2 with $T = 1$ and $\bar{P} = 0.90$ yields $\Delta_{P_1} = 0.155$. In a similar fashion we find $\Delta_{P_2} = 0.064$. From Equation 6-3,

$$\Delta_{PMS}^2 = 0.155^2 + 0.064^2 = 0.168^2$$

<u>Step 9a.</u>

Entering Figure 3-2 with $\Delta_{PMS} = 0.168$ and $\overline{PMS} = 0.85$ yields $T = 0.7$. Equation 7-2 yields $\overline{PMS} = 0.85$ (trial and calculated $\overline{PMS}$ identical).

<u>Step 10.</u>

$\bar{C}_1 = 41$ units

$\bar{C}_2 = 21$ Units

SECTION 8

CLOSING REMARKS

The applicable domain of the methodology is summarized as follows. The calculation of $\bar{C}$, δ_C, and $\Delta_{\bar{C}}$ will be relatively accurate and insensitive to the distribution details of the independent variables of C if the second-order term in the expression for $\bar{C}$ (Eq. 2-3a) is small compared to the first-order term. (The same remark applies to $\bar{D}$, δ_D, and $\Delta_{\bar{D}}$.) The calculation of $P(C > D)$ will be relatively accurate, provided C, $\bar{C}$, D, and $\bar{D}$ are unimodal in distribution and P and Q are near 0.5, say $0.01 < (P, Q) < 0.99$. C, $\bar{C}$, D, and $\bar{D}$ will exhibit unimodal distributions if their independent variables exhibit unimodal distributions or if there are many independent variables. The calculation of $Q(PMS > PMS_o)$ will be relatively accurate, provided the second-order term of $\overline{PMS}$ is small and PMS and Q are near 0.5, say $0.01 < PMS, Q < 0.99$.

We have elected to write $Q(P > P_o)$ for the probability that $P > P_o$, and to read $Q(P > P_o)$ as "Our confidence that P exceeds P_o." The use of confidence in this context has as its precedent the statement of the one-sided confidence limit for the estimate of a model parameter in classical statistics. Thus, strictly speaking, $Q(P \geq P_o)$ should be read "The lower one-sided Q-confidence limit for P is P_o."[*]

Our methodology (or for that matter any methodology of the same purpose) requires that the systematic COVs be quantified using subjective reasoning.[+] If the sponsor of the application of the methodology will not accept subjective estimates, then there can be no application. Most sponsors, however, will entertain the idea of subjective estimates if the bases for these estimates are well documented.

Finally, it should be remarked that admitting even less general definitions of the terms "system" and "mission" than are normally held (or discarding the concepts of "system" and "mission" altogether) gives the presented methodology, or at least portions of the methodology, quite general applicability. For example, the methodology could be applied to cost estimating, to scheduling, and to RDT&E planning.

---

[*] These remarks are also applicable for $Q(PMS > PMS_o)$.

[+] In the rare cases where specific experiments have been performed, systematic COVs can be calculated.

SECTION 9

REFERENCES

1. Benjamin, J.R. and Cornell, C.A. *Probability, Statistics, and Decision for Civil Engineers.* New York: McGraw-Hill, 1970.

2. Ang, A.H-S. and Cornell, C.A. "Reliability Bases of Structural Safety and Design," *Proc. ASCE Struct. Div.* 100: ST9, Sep 1974, pp 1755-1769.

3. Marsaglia, G., and Bray, T.A. "A Convenient Method for Generating Normal Variables," *SIAM Rev.* 6:3, 1964, pp 260-264.

4. Cornell, C.A. "Bounds on the Reliability of Structural Systems," *Proc. ASCE Struct. Div.* 93:ST1, Feb 1967, pp 786-795.

5. Kapur, K.C. and Lamberson, L.R. *Reliability in Engineering Design.* New York: Wiley & Sons, 1977.

6. Ang, A.H-S. "Approximate Probabilitistic Methods for Survivability/Vulnerability Analyses of Strategic Structures," N.M. Newmark Consulting Engineering Services, Urbana, IL., 1979.

APPENDIX A

DERIVATION OF EQUATIONS 3-2 AND 3-5

Suppose we know perfectly the "random" standard deviations σ_C and σ_D of the normal distributions of capacity and demand, respectively, but that the means μ_C and μ_D have an uncertainty represented by normal distributions with "systematic" standard deviations S_C and S_D in the respective unbiased estimates C and D. Let

$$\sigma^2 \; = \; \sigma_C^2 + \sigma_D^2$$

$$S^2 \; = \; S_C^2 + S_D^2$$

$$T \; = \; S/\sigma$$

$$\mu \; = \; \mu_C - \mu_D$$

$$m \; = \; \bar{C} - \bar{D}$$

$$A \; = \; m/\sigma$$

$$f(z) \; = \; (2\pi)^{-0.5} \exp(-z^2/2)$$

$$\Phi(z) \; = \; \int_{-\infty}^{z} f(t) \; dt$$

Then $\Phi(A)$ is known to be the median reliability, $\tilde{R}$. The problem is to find the mean reliability, $\bar{R}$.

THEOREM A-1: $\bar{R} \; = \; \Phi\left(A/\sqrt{1 + T^2}\right)$

Proof: The reliability is $\Phi(\mu/\sigma)$, where μ is normally distributed with mean m and standard deviation S. This is written as

$$\mu \; = \; N(m, \; S^2)$$

51

If we transform y to the variate

$$x = N(0, 1)$$

by the transformation

$$x = (y - m)/S$$

the reliability becomes

$$\phi(Tx + A).$$

Then

$$\bar{R} = \int_{-\infty}^{\infty} \phi(Tx + A) \, f(x) \, dx$$

$$\partial\bar{R}/\partial A = \int_{-\infty}^{\infty} f(Tx + A) \, f(x) \, dx$$

$$= (2\pi)^{-1} \int_{-\infty}^{\infty} \exp\left(-\{(Tx + A)^2 + x^2\}/2\right) \, dx.$$

Transform

$$w = x\sqrt{1 + T^2} + AT\Big/\sqrt{1 + T^2}$$

Then

$$\partial\bar{R}/\partial A = (2\pi)^{-1} \int_{-\infty}^{\infty} \exp\left(-\{w^2 + A^2/(1 + T^2)\}/2\right) \, dw\Big/\sqrt{1 + T^2}$$

$$= \{2\pi(1 + T^2)\}^{-0.5} \exp\left(-A^2/2(1 + T^2)\right)\int_{-\infty}^{\infty} f(w) \, dw$$

$$= f\left(A\Big/\sqrt{1 + T^2}\right)\Big/\sqrt{1 + T^2}$$

$$\bar{R} = \phi\left(A\Big/\sqrt{1 + T^2}\right) + K$$

Where K denotes an arbitrary constant of integration. Since $\bar{R} = 0.5$ when $A = 0$, we have

$$0.5 = \Phi(0) + K$$

$$K = 0. \qquad \text{QED.}$$

Suppose now that capacities and demands are lognormally distributed, not normally distributed.[*] Let

$$z = \log(\text{capacity}) = N(\mu, \sigma^2)$$

THEOREM A-2: The n<u>th</u> moment of capacity is $\exp(n\mu + n^2\sigma^2/2)$

Proof: Let $x = N(0, 1)$, and let $E[g]$ denote the expected value of g.

$$m_n \quad E[C^n] \equiv E[e^{zn}] = E[\exp((x\sigma + \mu)\,n)]$$

$$= (2\pi)^{-0.5} \int_{-\infty}^{\infty} \exp((x\sigma + \mu)\,n) \exp(-x^2/2) \, dx$$

Let

$$y = x - \sigma n$$

Then

$$m_n = (2\pi)^{-0.5} \int_{-\infty}^{\infty} \exp(-y^2/2 + \sigma^2 n^2/2 + \mu n) \, dy$$

$$= \exp(n\mu + n^2\sigma^2/2)$$

Corollary: $E[C] = \exp(\mu + \sigma^2/2).$

---

[*]At this point we should note that the preferred procedure is to transform all observations by $z = \log C$ and work with the transformed sample, if this sample passes a goodness-of-fit test for normality. The remainder of this Appendix would then be unnecessary.

Corollary: If δ is the coefficient of variation of C, then

$$\delta^2 = m_2'/m_1^2 = \left| m_2 - m_1^2 \right| / m_1^2$$

$$= \left| \exp(2\mu + 2\sigma^2) - \left\{ \exp(\mu + \sigma^2/2) \right\}^2 \right| / \left\{ \exp(\mu + \sigma^2/2) \right\}^2 = \exp(\sigma^2) - 1$$

$$\sigma^2 = \log(1 + \delta^2)$$

Note that $\delta^2 \approx \sigma^2 + \sigma^4/2 + \sigma^6/6$, small σ. Also $\delta^4 \approx \sigma^4 + \sigma^6$, $\delta^6 \approx \sigma^6$.

Corollary: The third central moment is

$$m_3' = m_3 - 3m_2 m_1 + 3m_1^3 - m_1^3$$

$$= \exp(3\mu + 3\sigma^2/2) \left\{ \exp(3\sigma^2) - 3\exp(\sigma^2) + 2 \right\}$$

$$\approx m_1^3 \left\{ 3\sigma^4 + 4\sigma^6 \right\}, \quad \text{for small } \sigma.$$

Corollary: The fourth central moment is

$$m_4' = m_4 - 4m_3 m_1 + 6m_2 m_1^2 - 4m_1^4 + m_1^4$$

$$\doteq m_1^4 \left\{ 3\sigma^4 + 19\sigma^6 \right\}, \quad \text{for small } \sigma.$$

Let $\bar{C}_n$ denote the mean of a sample of size n.

Corollary: $E[\bar{C}_n] = \exp(\mu + \sigma^2/2)$

THEOREM A-3: The second central moment of $\bar{C}_n$ is $E^2[C]\,\delta^2/n$.

Proof:
$$E\left[(\bar{C}_n)^2\right] = E\left[\left(\sum_{i=1}^{n} e^{x_i}/n\right)^2\right]$$

$$= E\left[\sum_{i=1}^{n} e^{2x_i} + 2\sum_{i\neq j} e^{x_i x_j}\right]\Big/n^2$$

$$= \left(nm_2 + n(n-1)\,m_1^2\right)\Big/n^2$$

$$= \left(\exp(2\mu + 2\sigma^2) + (n-1)\,\exp(2\mu + \sigma^2)\right)\Big/n$$

$$E\left[(\bar{C}_n)^2\right] - E^2\left[\bar{C}_n\right] = \exp(2\mu + \sigma^2)\{\exp(\sigma^2) - 1\}\Big/n \cdot \text{QED}$$

Corollary: If Δ denotes the coefficient of variation of $\bar{C}_n$, then $\Delta^2 = \delta^2/n$.

THEOREM A-4:

$$E\left[\log(\bar{C}_n)\right] \approx \mu + \sigma^2(n-1)/2n - \sigma^4(n-1)/4n^2$$
$$- \sigma^6(n-1)(n-6)/12n^3, \quad \text{for small } \sigma.$$

Proof:

$$E\left[\log\left(\sum_{i=1}^{n} e^{z_i}/n\right)\right] = E\left[\log\left(\exp(\mu + \sigma^2/2) + \sum_{i=1}^{n}\{\exp(z_i) - \exp(\mu + \sigma^2/2)\}/n\right)\right]$$

$$= \mu + \sigma^2/2$$

$$+ E\left[\log\left(1 + \sum_{i=1}^{n}\{\exp(z_i) - \exp(\mu + \sigma^2/2)\}\Big/n\exp(\mu + \sigma^2/2)\right)\right]$$

Since

$$\log(1 + w) \simeq w - w^2/2 + w^3/3 - w^4/4 + w^5/5 - w^6/6$$

$$E[\log(\bar{C}_n)] \simeq \mu + \sigma^2/2 - n\delta^2/2n^2 + n(3\sigma^4 + 4\sigma^6)/3n^3$$

$$-n(3\sigma^4 + 19\sigma^6)/4n^4 - 3n(n - 1)\delta^4/4n^4$$

$$+ 10n(n - 1)(3\sigma^4\delta^2)/5n^5 - 15n(n - 1)(n - 2)\delta^6/6n^6$$

Ignoring terms of order σ^6/n^4 , σ^8, or less. Then

$$E[\log(\bar{C}_n)] \simeq \mu + \sigma^2(n - 1)/2n - \sigma^4(1/4n - 1/n^2 + 3/4n^3 + 3/4n^2 - 3/4n^3)$$

$$+ \sigma^6(-1/12n + 4/3n^2 - 19/4n^3 - 3/4n^2 + 3/4n^3$$

$$+ 6/n^3 - 5/2n^3) \cdot \text{QED}$$

THEOREM A-5: If

$$\hat{\mu}_C \equiv \log\left\{\bar{C}_n\sqrt{1 + \Delta^2}\Big/\sqrt{1 + \delta^2}\right\}$$

then

$$E[\hat{\mu}_C] \simeq \mu + \sigma^6(n - 1)/3n^3$$

Proof:

$$\frac{1}{2}\log\left\{(1 + \delta^2/n)/(1 + \delta^2)\right\} = \frac{1}{2n}\log\left\{1 + \delta^2/n\right\}^n - \frac{1}{2}\log(1 + \delta^2)$$

$$\simeq \frac{1}{2n}\log\left\{1 + \delta^2 + (n - 1)\delta^4/2n + (n - 1)(n - 2)\delta^6/6n^2\right\} - \sigma^2/2$$

$$\simeq \frac{1}{2n}\log\left\{[1 + \delta^2][1 + (n - 1)\delta^4/2n + (n - 1)(n - 2)\delta^6/6n^2 - (n - 1)\delta^6/2n]\right\}$$

$$- \sigma^2/2$$

$$\approx \sigma^2/2n + \frac{1}{2n} \left[(n - 1)(\sigma^4 + \sigma^6)/2n + \sigma^6(n^2 - 3n + 2 - 3n^2 + 3n)/6n^2 \right] - \sigma^2/2$$

$$= -\sigma^2(n - 1)/2n + \sigma^4(n - 1)/4n^2 + \sigma^6[n^2 - 3n + 2]/12n^3$$

and the theorem follows from A-4. QED

From Theorem A-5, $\hat{\mu}_C$ is an asymptotically unbiased estimate of μ_C. We could then proceed in the same way with the demands. The result would be that $\hat{\mu}_C - \hat{\mu}_D$ would be an asymptotically unbiased estimate of $\mu_C - \mu_D$. The median reliability would then be

$$\tilde{R} \doteq \Phi \left(\left(\hat{\mu}_C - \hat{\mu}_D \right) \Big/ \sqrt{\sigma_C^2 + \sigma_D^2} \right)$$

which is Equation 3-5. Equation 3-2 follows from this and Theorem A-1.

APPENDIX B

DERIVATION OF EQUATIONS 3-6 AND 3-7

What is the variance of the reliability, given the same notation as in Appendix A? From that discussion, we have

$$R = \Phi(Tx + A)$$

where

$$x = N(0, 1).$$

The variance is

$$\sigma_R^2 = \int_{-\infty}^{\infty} \Phi^2(Tx + A) \ f(x) \ dx - \bar{R}^2$$

Let

$$\tilde{R} \equiv \Phi(A),$$

the median reliability. We have two approximations for σ_R^2, one for values $T < 0.3$ and the other for $T \geq 0.3$. These are tabulated for different values of $\tilde{R}$ and T and compared with the values from numerical integration (see Table B-1). The first approximation was uncovered as follows: Let

$$M_2(T) = \int_{-\infty}^{\infty} \Phi^2(Tx + A) \ f(x) \ dx.$$

Then

$$M_2'(T) = \int_{-\infty}^{\infty} 2x\Phi(Tx + A) \ f(Tx + A) \ f(x) \ dx$$

$$M_2''(T) = \int_{-\infty}^{\infty} 2x^2 f(x) \ dx \left[f^2(Tx + A) + \Phi(Tx + A) \ f'(Tx + A) \right]$$

$$M_2'''(T) = \int_{-\infty}^{\infty} 2x^3 f(x) \, dx [3ff' + \phi f'']$$

$$M_2''''(T) = \int_{-\infty}^{\infty} 2x^4 f(x) \, dx [3f'^2 + 4ff'' + \phi f'''].$$

Since

$$f'(x) = -xf(x)$$

$$f''(x) = (x^2 - 1) f(x)$$

$$f'''(x) = (-x^3 + 3x) f(x)$$

we have

$$M_2(0) = \phi^2(A)$$

$$M_2'(0) = 0$$

$$M_2''(0) = 2f(A)[f(A) - A\phi(A)]$$

$$M_2'''(0) = 0$$

$$M_2''''(0) = 6f(A)[3A^2 f(A) + 4(A^2 - 1) f(A) + (-A^3 + 3A) \phi(A)]$$

Expansion around $T = 0$ then gives

$$M_2(T) \cong \phi^2(A) + T^2 f(A) \left[f(A) - A\phi(A) \right]$$
$$+ T^4 f(A) \left[f(A)\{7A^2 - 4\} + \phi(A)[-A^3 + 3A] \right] \Big/ 4$$

Similarly:

$$\bar{R}(T) = \int_{-\infty}^{\infty} \phi(Tx + A) \ f(x) \ dx$$

$$\bar{R}'(T) = \int_{-\infty}^{\infty} xf(Tx + A) \ f(x) \ dx$$

$$\bar{R}''(T) = \int_{-\infty}^{\infty} x^2 f'(Tx + A) \ f(x) \ dx$$

$$\bar{R}'''(T) = \int_{-\infty}^{\infty} x^3 f''(Tx + A) \ f(x) \ dx$$

$$\bar{R}''''(T) = \int_{-\infty}^{\infty} x^4 f'''(Tx + A) \ f(x) \ dx$$

$$\bar{R}(0) = \phi(A)$$

$$\bar{R}'(0) = 0$$

$$\bar{R}''(0) = -Af(A)$$

$$\bar{R}'''(0) = 0$$

$$\bar{R}''''(0) = 3Af(A)[3 - A^2]$$

$$\bar{R}(T) \approx \phi(A) - T^2 Af(A)/2 + T^4 \ Af(A)[3 - A^2]/8$$

$$\bar{R}^2(T) \approx \phi^2(A) - T^2 Af(A)\phi(A) + T^4 Af(A)[Af(A) + \phi(A)\{3 - A^2\}]/4$$

$$\sigma_R^2 = M_2(T) - \bar{R}^2(T) \simeq T^2 f^2(A) + T^4 f^2(A)[7A^2 - 4 - A^2]/4$$

$$= f^2(A)\, T^2(1 + T^2(3A^2/2 - 1))$$

$$\simeq f^2\left(A\left/\sqrt{1 + 3T^2/2}\right.\right)\left/(1 + T^2)\right.$$

and our first approximation is

$$\sigma_R \simeq f\left(A\left/\sqrt{1 + 3T^2/2}\right.\right) T\left/\sqrt{1 + T^2}\right., \text{ small } T.$$

For our second approximation, we notice that (see Table B-1)

$$\sigma_R^2 \simeq \left.\sigma_R^2\right|_{A=0} \left[4\bar{R}(1 - \bar{R})\right]^{T^{-0.2155}/0.7535}, \quad \text{large } T.$$

All we need, therefore, is $\left.\sigma_R^2\right|_{A=0}$

THEOREM B-1:

$$\left.\sigma_R^2\right|_{A=0} = 0.25 - (1/\pi)\cot^{-1}\sqrt{1 + 2T^2}$$

Proof:

$$\partial M_2(T)/\partial A = 2\int_{-\infty}^{\infty} \Phi(Tx + A)\, f(Tx + A)\, f(x)\, dx$$

$$= (1/\pi)\int_{-\infty}^{\infty} \Phi(Tx + A)\exp(-\{[Tx + A]^2 + x^2\}/2)\, dx$$

If we make the substitution

$$y = x\sqrt{1 + T^2} + AT\left/\sqrt{1 + T^2}\right.$$

we have

$$\partial M_2(T)/\partial A = (1/\pi) \int_{-\infty}^{\infty} \phi\left(Ty\Big/\sqrt{1 + T^2} + A/(1 + T^2)\right)$$

$$\exp\left(-\left\{y^2 + A^2/(1 + T^2)\right\}/2\right) dy\Big/\sqrt{1 + T^2}$$

$$= 2f(A') \int_{-\infty}^{\infty} \phi(T'y + A'') \, f(y) \, dy\Big/\sqrt{1 + T^2}$$

where

$$A' = A\Big/\sqrt{1 + T^2}$$

$$T' = T\Big/\sqrt{1 + T^2}$$

$$A'' = A'\Big/\sqrt{1 + T^2}$$

Then the algebra of Theorem A-1 gives

$$\partial M_2(T)/\partial A = 2f(A')\phi\left(A''\Big/\sqrt{1 + T'^2}\right)\Big/\sqrt{1 + T^2}$$

$$\partial M_2(T)/\partial A' = 2f(A')\phi\left(A'\Big/\sqrt{1 + 2T^2}\right)$$

$$M_2(T) = 2 \int_{-\infty}^{A'} f(w)\phi\left(w\Big/\sqrt{1 + 2T^2}\right) dw$$

Now let

$$r \equiv 1\Big/\sqrt{1 + 2T^2}$$

$$M_2(r) = 2 \int_{-\infty}^{A'} f(w)\phi(rw) \, dw$$

$$\partial M_2(r)/\partial r \;=\; 2 \int_{-\infty}^{A'} w f(w)\, f(rw)\, dw$$

$$=\; (1/\pi) \int_{-\infty}^{A'} \exp\left(-\left\{r^2 + 1\right\} w^2/2\right)\, w\, dw$$

$$=\; -\exp\left(-A'^2(r^2 + 1)/2\right)\Big/\pi(r^2 + 1)$$

$$=\; -\exp\left(-A^2 r^2\right)\Big/\pi(r^2 + 1)^{*}$$

Now, if $A = 0$, then $\bar{R} = 0.5$ and

$$M_2(r) \;=\; 0.5 - \int_0^r dr/\pi(r^2 + 1) \;=\; 0.5 - (1/\pi)\tan^{-1}(r)$$

$$\sigma_R^2 \;=\; 0.25 - (1/\pi)\tan^{-1}(r) \cdot \text{QED}$$

---

*From this, we could get an approximation for extremely large T (small r):

$$M_2(r) \;\simeq\; 0.5 - r/\pi + r^3(A^2 + 1)/3\pi$$

$$\sigma_R^2 \;\simeq\; 0.5 - r/\pi + r^3(A^2 + 1)/3\pi - \bar{R}^2.$$

$\bar{R}$	T = 0.1		T = 0.2		T = 0.3		T = 0.5		T = 1.0		T = 2.0	
	Exact	Approx.1	Exact	Approx.1	Exact	Approx.2	Exact	Approx.2	Exact	Approx.2	Exact	Approx.2
0.5	0.039697	0.039696	0.078249	0.078239	0.114701	0.114701	0.179017	0.179017	0.288675	0.288675	0.384166	0.384166
0.6	0.038461	0.038455	0.075915	0.075862	0.111501	0.111064	0.174877	0.174568	0.284961	0.284790	0.382398	0.382376
0.7	0.034664	0.034644	0.068729	0.068550	0.101609	0.099952	0.161946	0.160762	0.273103	0.272418	0.376650	0.376562
0.8	0.028004	0.027970	0.055658	0.055658	0.083947	0.080629	0.138305	0.135889	0.250296	0.248756	0.365121	0.364907
0.9	0.017676	0.017620	0.036503	0.035523	0.055630	0.051146	0.098472	0.095106	0.207553	0.204900	0.341524	0.341091
0.95	0.010470	0.010401	0.021140	0.021107	0.034835	0.030824	0.066948	0.063883	0.167907	0.164803	0.316618	0.316008
0.99	0.002760	0.002724	0.006096	0.005800	0.010591	0.008878	0.025162	0.023958	0.098419	0.095883	0.261507	0.260700
0.999	0.000360	0.000351	0.000847	0.000793	0.001720	0.001437	0.005692	0.005694	0.044105	0.043099	0.196003	0.195283
0.9999	0.000044	0.000042	0.000115	0.000101	0.000263	0.000231	0.001237	0.001350	0.019526	0.019341	0.146138	0.145676
0.99999	0.000005	0.000005	0.000015	0.000012	0.000039	0.000037	0.000265	0.000321	0.008639	0.008718	0.108885	0.108681
0.999999	0.000001	0.000001	0.000002	0.000001	0.000006	0.000006	0.000056	0.000077	0.003833	0.003948	0.081212	0.081204
0.9999999	0.000000	0.000000	0.000000	0.000000	0.000001	0.000001	0.000012	0.000018	0.001707	0.001795	0.060676	0.060792

Table B-1. Exact and approximate values of σ_R

65

DEPARTMENT OF DEFENSE

Assistant to the Secretary of Defense
Atomic Energy
     ATTN: Executive Assistant

Defense Advanced Rsch. Proj. Agency
     ATTN: TIO

Defense Intelligence Agency
     ATTN: DB-4C3
     ATTN: DB-4C1
     ATTN: DB-4C2, B. Morris
     ATTN: RDS-3A
     ATTN: DB-4C2, T. Ross

Defense Nuclear Agency
     ATTN: STSP
2 cy ATTN: SPSS
2 cy ATTN: SPAS
4 cy ATTN: TITL

Defense Technical Information Center
12 cy ATTN: DD

Field Command
Defense Nuclear Agency
     ATTN: FCPR
     ATTN: FCTMOF
     ATTN: FCT

Field Command
Defense Nuclear Agency
Livermore Division
     ATTN: FCPRL

Field Command Test Directorate
     ATTN: FCTC

Interservice Nuclear Weapons School
     ATTN: TTV

Joint Strat. Tgt. Planning Staff
     ATTN: DOXT
     ATTN: JLTW-2
     ATTN: JLA
     ATTN: NRI-STINFO Library
     ATTN: XPFS

NATO School (SHAPE)
     ATTN: U.S. Documents Officer

Undersecretary of Defense for Rsch. & Engrg.
     ATTN: Strategic & Space Systems (OS)

DEPARTMENT OF THE ARMY

BMD Advanced Technology Center
Department of the Army
     ATTN: ATC-T
     ATTN: 1CRDABH-X

BMD Systems Command
Department of the Army
     ATTN: BMDSC-H, N. Hurst

DEPARTMENT OF THE ARMY (Continued)

Chief of Engineers
Department of the Army
     ATTN: DAEN-MCE-D
     ATTN: DAEN-RDM

Construction Engineering Rsch. Lab.
Department of the Army
     ATTN: CERL-SOI-L

Deputy Chief of Staff for Ops. & Plans
Department of the Army
     ATTN: DAMO-NC
     ATTN: MOCA-ADL

Deputy Chief of Staff for Rsch., Dev., & Acq.
Department of the Army
     ATTN: DAMA-CSS-N

Engineer Studies Center
Department of the Army
     ATTN: DAEN-FES, LTC Hatch

Harry Diamond Laboratories
Department of the Army
     ATTN: DELHD-I-TL
     ATTN: DELHD-N-P

U.S. Army Armament Material Readiness Command
     ATTN: MA Library

U.S. Army Ballistic Research Labs
     ATTN: DRDAR-BLV
     ATTN: DRDAR-BLE, J. Keefer
     ATTN: DRDAR-BLT, C. Kingery
     ATTN: DRDAR-BLT, A. Ricchiazzi
     ATTN: DRDAR-BLT, W. Taylor

U.S. Army Communications Command
     ATTN: Technical Reference Division

U.S. Army Engineer Center
     ATTN: ATZA

U.S. Army Engineer Division Huntsville
     ATTN: HNDED-SR

U.S. Army Engineer Div. Ohio River
     ATTN: ORDAS-L

U.S. Army Engineer School
     ATTN: ATZA-DTE-ADM
     ATTN: ATZA-CDC

U.S. Army Engr. Waterways Exper. Station
     ATTN: WESSD, G. Jackson
     ATTN: J. Strange
     ATTN: Library
     ATTN: WESSE, L. Ingram
     ATTN: WESSA, W. Flathau
     ATTN: F. Brown
     ATTN: WESSS, J. Ballard

U.S. Army Foreign Science & Tech. Ctr.
     ATTN: DRXST-SD

DEPARTMENT OF THE ARMY (Continued)

U.S. Army Mat. Cmd. Proj. Mngr. for Nuc. Munitions
    ATTN: DRCPM-NUC

U.S. Army Material & Mechanics Rsch. Ctr.
    ATTN: DRXMR, J. Mescall
    ATTN: Technical Library
    ATTN: DRXMR-TE, R. Shea

U.S. Army Materiel Dev. & Readiness Cmd.
    ATTN: DRXAM-TL
    ATTN: DRCDE-D, L. Flynn

U.S. Army Missile R&D Command
    ATTN: RSIC
    ATTN: DRDMI-XS

U.S. Army Mobility Equip. R&D Command
    ATTN: DRDME-WC
    ATTN: DRDME-HT, A. Tolbert

U.S. Army Nuclear & Chemical Agency
    ATTN: Library

U.S. Army War College
    ATTN: Library

U.S. Military Academy
Department of the Army
    ATTN: R. La Frenz

DEPARTMENT OF THE NAVY

Marine Corps
Department of the Navy
    ATTN: POM

David Taylor Naval Ship R&D Ctr.
    ATTN: Code 177, E. Palmer
    ATTN: Code L42-3
    ATTN: Code 1740.5
    ATTN: Code 1740, R. Short
    ATTN: Code 1700, W. Murray
    ATTN: Code 2740

Marine Corp Dev. & Education Command
Department of the Navy
    ATTN: D091, J. Hartneady

Naval Air Systems Command
    ATTN: F. Marquardt

Naval Construction Battalion Center
    ATTN: Code L51, S. Takahashi
    ATTN: Code L51, J. Crawford
    ATTN: Code L51, R. Odello
    ATTN: Code L51, W. Shaw

Naval Electronic Systems Command
    ATTN: PME 117-21

Naval Electronics Systems Command
    ATTN: Commander

Naval Explosive Ord. Disposal Fac.
    ATTN: Code 504, J. Petrousky

Naval Facilities Engineering Command
    ATTN: Code 04B
    ATTN: Code 03T
    ATTN: Code 09M22C

DEPARTMENT OF THE NAVY (Continued)

Naval Material Command
    ATTN: MAT 08T-22

Naval Ocean Systems Center
    ATTN: Code 4471
    ATTN: Code 013, E. Cooper

Naval Postgraduate School
    ATTN: Code 1424, Library
    ATTN: Code 0142, Library

Naval Research Laboratory
    ATTN: Code 8440, G. O'Hara
    ATTN: Code 8404, H. Pusey
    ATTN: Code 8403, R. Belsham
    ATTN: Code 2627
    ATTN: Code 8440, F. Rosenthal

Naval Sea Systems Command
    ATTN: SEA-9931G
    ATTN: SEA-0351
    ATTN: SEA-09G53
    ATTN: SEA-06J, R. Lane
    ATTN: SEA-033

Naval Surface Weapons Center
    ATTN: Code F31
    ATTN: Code R14
    ATTN: Code R10
    ATTN: Code U401, M. Kleinerman

Naval Surface Weapons Center
    ATTN: Tech. Library & Info. Services Branch
    ATTN: W. Wishard

Naval War College
    ATTN: Code E-11

Naval Weapons Center
    ATTN: Code 233
    ATTN: Code 3263, J. Bowen
    ATTN: Code 266, C. Austin

Naval Weapons Evaluation Facility
    ATTN: R. Hughes
    ATTN: Code 10

Office of Naval Research
    ATTN: Code 474, N. Perrone
    ATTN: Code 463, J. Heacock
    ATTN: Code 715

Office of the Chief of Naval Operations
    ATTN: OP 03EG
    ATTN: OP 604C3, R. Piacesi
    ATTN: OP 981
    ATTN: OP 098T8
    ATTN: OP 982E, M. Lenzini
    ATTN: OP 982

Strategic Systems Project Office
Department of the Navy
    ATTN: NSP-43
    ATTN: NSP-272
    ATTN: NSP-273

DEPARTMENT OF THE AIR FORCE

Air Force Armament Laboratory
    ATTN: DLYV, J. Collins

DEPARTMENT OF THE AIR FORCE (Continued)

Aerospace Defense Command
Department of the Air Force
ATTN: XPX

Air Force Geophysics Laboratory
ATTN: LWW, K. Thompson

Air Force Institute of Technology
ATTN: Commander
ATTN: Library

Air Force Office of Scientific Research
ATTN: NA, B. Wolfson

Air Force Systems Command
ATTN: DLW
ATTN: R. Cross

Air Force Weapons Laboratory
Air Force Systems Command
ATTN: SUL
ATTN: NTES-C, R. Henny
ATTN: NTES-G, S. Melzer
ATTN: NTED
ATTN: NTE, M. Plamondon

Assistant Chief of Staff
Intelligence
Department of the Air Force
ATTN: IN

Ballistic Missile Office
Air Force Systems Command
ATTN: DEB

Ballistic Missile Office
Air Force Systems Command
ATTN: MMH
ATTN: MNNH

Deputy Chief of Staff, Research, Dev., & Acq.
Department of the Air Force
ATTN: R. Steere
ATTN: AFRDQSM

Deputy Chief of Staff
Logistics & Engineering
Department of the Air Force
ATTN: LEEE

Foreign Technology Division
Air Force Systems Command
ATTN: SDBF, S. Spring
ATTN: TQTD
ATTN: NIIS Library
ATTN: SDBG

Headquarters Space Division
Air Force Systems Command
ATTN: DYS

Headquarters Space Division
Air Force Systems Command
ATTN: RSS, D. Dowler

Rome Air Development Center
Air Force Systems Command
ATTN: TSLD
ATTN: RBES, R. Mair
ATTN: Commander

DEPARTMENT OF THE AIR FORCE (Continued)

Strategic Air Command
Department of the Air Force
ATTN: NRI-STINFO Library
ATTN: XPFS

Director of Conferences
United States Air Force Academy
ATTN: DFCEM, W. Fluhr

DEPARTMENT OF ENERGY

Department of Energy
Albuquerque Operations Office
ATTN: CTID

Department of Energy
ATTN: OMA/RD&T

Department of Energy
Nevada Operations Office
ATTN: Mail & Records for Tech. Library

DEPARTMENT OF ENERGY CONTRACTORS

Lawrence Livermore National Laboratory
ATTN: L-90, R. Dong
ATTN: L-437, R. Schock
ATTN: L-7, J. Kahn
ATTN: T. Gold
ATTN: L-200, J. Cortez
ATTN: L-96, L. Woodruff
ATTN: Tech. Information Dept. Library
ATTN: L-90, D. Norris
ATTN: J. Thomsen
ATTN: L-205, J. Hearst
ATTN: M. Fernandez
ATTN: J. Goudreau
ATTN: L-200, T. Butkovich

Los Alamos National Scientific Laboratory
ATTN: RMS 364
ATTN: G. Spillman
ATTN: M/S632, T. Dowler
ATTN: A. Davis

Oak Ridge National Laboratory
ATTN: Civil Def. Res. Proj.
ATTN: Central Research Library

Sandia National Laboratories
Livermore Laboratory
ATTN: Library & Security Classification Div.

Sandia National Laboratories
ATTN: W. Roherty
ATTN: W. Herrmann
ATTN: A. Chabai
ATTN: L. Hill
ATTN: L. Vortman
ATTN: 3141

OTHER GOVERNMENT AGENCIES

Central Intelligence Agency
ATTN: OSI/NED

Department of the Interior
Bureau of Mines
ATTN: Technical Library

OTHER GOVERNMENT AGENCIES (Continued)

Department of the Interior
U.S. Geological Survey
    ATTN: D. Roddy

Federal Emergency Management Agency
    ATTN: Hazard Eval. & Vul. Red. Div.

NASA
    ATTN: R. Jackson

U.S. Nuclear Regulatory Commission
    ATTN: Div. of Security for L. Shao

DEPARTMENT OF DEFENSE CONTRACTORS

Acurex Corp.
    ATTN: J. Stockton

Aerospace Corp.
    ATTN: L. Selzer
    ATTN: P. Mathur
 2 cy ATTN: Technical Information Services

Agbabian Associates
    ATTN: C. Bagge
    ATTN: M. Agbabian

Analytic Services, Inc.
    ATTN: G. Hesselbacher

Applied Theory, Inc.
 2 cy ATTN: J. Trulio

Artec Associates, Inc.
    ATTN: S. Gill

AVCO Research & Systems Group
    ATTN: D. Henderson
    ATTN: W. Broding
    ATTN: J. Atanasoff
    ATTN: Library A830

BDM Corp.
    ATTN: Corporate Library
    ATTN: A. Lavagnino
    ATTN: T. Neighbors

BDM Corp.
    ATTN: R. Hensley

Bell Telephone Labs
    ATTN: J. White

Boeing Co.
    ATTN: Aerospace Library
    ATTN: R. Holmes
    ATTN: R. Hager
    ATTN: M/S 42/37, R. Carlson
    ATTN: J. Wooster
    ATTN: R. Dyrdahl

Boeing Co.
    ATTN: M/S 42/37, K. Friddell

California Research & Technology, Inc.
    ATTN: Library
    ATTN: K. Kreyenhagen
    ATTN: S. Schuster

DEPARTMENT OF DEFENSE CONTRACTORS (Continued)

California Institute of Technology, Inc.
    ATTN: T. Ahrens

California Research & Technology, Inc.
    ATTN: D. Orphal

Calspan Corp.
    ATTN: Library

Center for Planning & Rsch., Inc.
    ATTN: R. Shnider

Civil Systems, Inc.
    ATTN: J. Bratton

University of Denver, Colorado Seminary
    ATTN: Sec. Officer for J. Wisotski

EG&G Washington Analytical Services Center, Inc.
    ATTN: Director
    ATTN: Library

Electric Power Research Institute
    ATTN: G. Sliter

Electromechanical Sys. of New Mexico, Inc.
    ATTN: R. Shunk

Eric H. Wang, Civil Engineering Rsch. Fac.
    ATTN: N. Baum
    ATTN: D. Calhoun

Gard, Inc.
    ATTN: G. Neidhardt

General Dynamics Corp.
    ATTN: K. Anderson

General Electric Co.
    ATTN: M. Bortner

General Electric Co.
    ATTN: A. Ross

General Electric Company—TEMPO
    ATTN: DASIAC

General Research Corp.
    ATTN: B. Alexander

Geocenters, Inc.
    ATTN: E. Marram

H-Tech Labs., Inc.
    ATTN: B. Hartenbaum

Honeywell, Inc.
    ATTN: T. Helvig

IIT Research Institute
    ATTN: Documents Library
    ATTN: A. Longinow

Institute for Defense Analyses
    ATTN: Classified Library
    ATTN: Director

J. H. Wiggins Co., Inc.
    ATTN: J. Collins

Kaman AviDyne
 ATTN: G. Zartarian
 ATTN: N. Hobbs
 ATTN: Library
 ATTN: E. Criscione

Kaman Sciences Corp.
 ATTN: F. Shelton
 ATTN: Library
 ATTN: D. Sachs

Karagozian and Case
 ATTN: J. Karagozian

Lockheed Missiles & Space Co., Inc.
 ATTN: B. Almroth
 ATTN: T. Geers

Lockheed Missiles & Space Co., Inc.
 ATTN: TIC-Library

Management Science Associates
 ATTN: K. Kaplan

Martin Marietta Corp.
 ATTN: G. Fotieo
 ATTN: A. Cowan

Martin Marietta Corp.
 ATTN: J. Donathan

University of Massachusetts
 ATTN: W. Nash

McDonnell Douglas Corp.
 ATTN: R. Halprin

Merritt CASES, Inc.
 ATTN: J. Merritt
 ATTN: Library

Meteorology Research, Inc.
 ATTN: W. Green

Mitre Corp.
 ATTN: Director

Nathan M. Newmark Consult. Eng. Svcs.
 ATTN: J. Haltiwanger
 ATTN: N. Newmark
 ATTN: W. Hall

University of New Mexico
 ATTN: G. Triandafalidis

University of Oklahoma
 ATTN: J. Thompson

Pacific-Sierra Research Corp.
 ATTN: H. Brode

Pacifica Technology
 ATTN: R. Allen
 ATTN: R. Bjork
 ATTN: G. Kent

Physics International Co.
 ATTN: F. Sauer
 ATTN: R. Swift
 ATTN: C. Vincent
 ATTN: E. Moore
 ATTN: L. Behrmann
 ATTN: Technical Library

University of Pittsburgh
 ATTN: M. Willims, Jr.

R & D Associates
 ATTN: P. Rausch
 ATTN: A. Field
 ATTN: R. Port
 ATTN: J. Lewis
 ATTN: Technical Information Center
 ATTN: A. Latter
 ATTN: C. MacDonald
 ATTN: W. Wright, Jr.
 ATTN: P. Haas

Rand Corp.
 ATTN: A. Laupa
 ATTN: C. Mow
 ATTN: Library

Science Applications, Inc.
 ATTN: Technical Library

Science Applications, Inc.
 ATTN: S. Oston

Science Applications, Inc.
 ATTN: D. Maxwell
 ATTN: R. Hoffman
 ATTN: D. Bernstein

Science Applications, Inc.
 ATTN: G. Binninger
 ATTN: B. Chambers III
 ATTN: W. Layson

Southwest Research Institute
 ATTN: A. Wenzel
 ATTN: W. Baker

SRI International
 ATTN: G. Abrahamson
 ATTN: W. Wilkinson

Systems, Science & Software, Inc.
 ATTN: T. Riney
 ATTN: T. Cherry
 ATTN: Library
 ATTN: D. Grine
 ATTN: T. McKinley
 ATTN: R. Sedgewick

Teledyne Brown Engineering
 ATTN: J. Ravenscraft

Terra Tek, Inc.
 ATTN: Library
 ATTN: S. Green
 ATTN: A. Jones